


MDI

INCORPORATED

www.mdius.com

Catalog W

**Mercury & Solid State
Contactors • Relays • Switches
Liquid Level Control Floats**

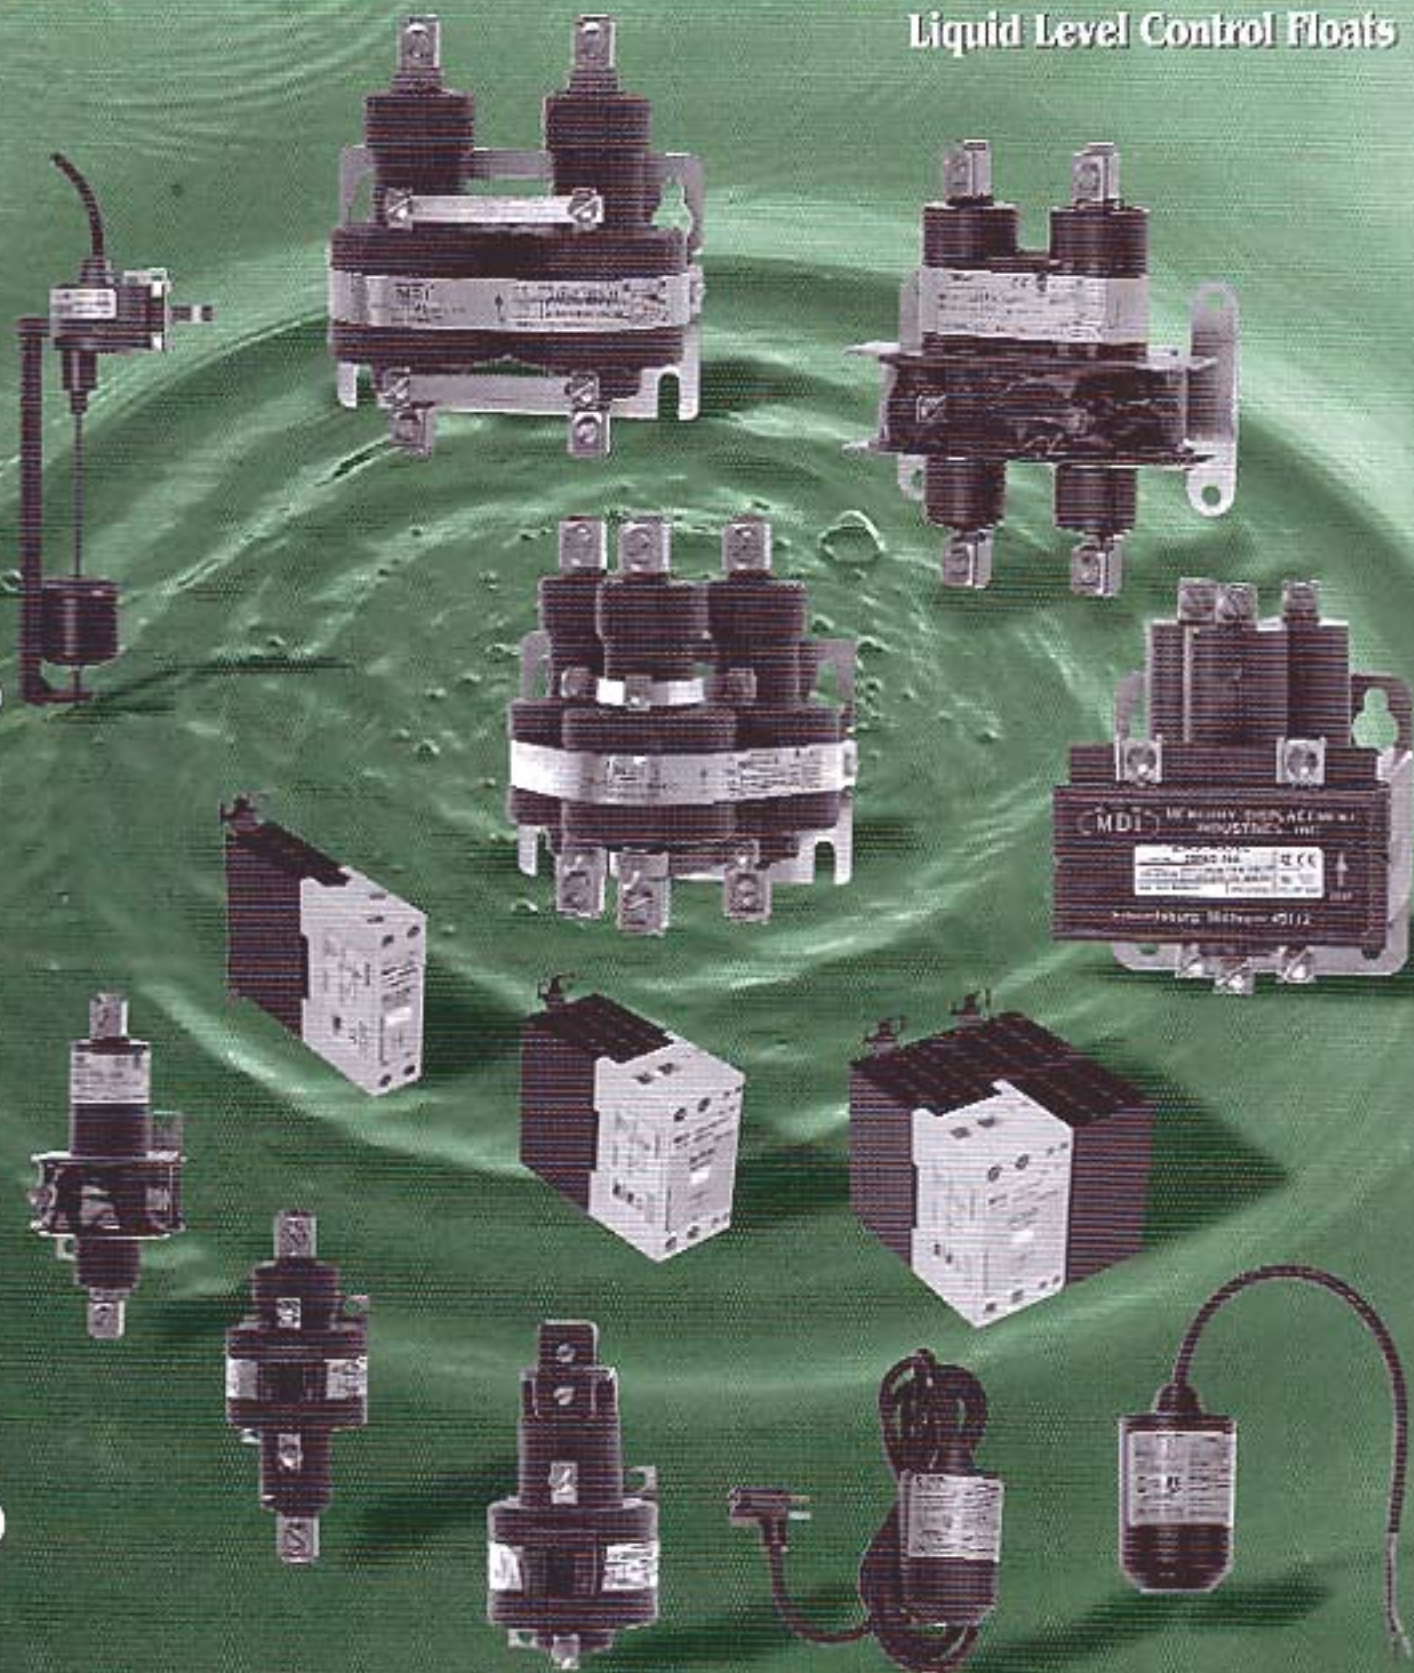

GENERAL INFORMATION

FEATURES AND SELECTION FACTORS

GENERAL INFORMATION

Mercury Displacement Relays are all designed and built to meet the most exacting demands of industry. They have won their high place in the electrical field by doing the tough and tricky jobs that ordinary equipment could at best do in an uncertain manner. They have proved their ability to stand up under the most adverse conditions of temperature, dust and moisture, in all types of applications. All the care required for the manufacture of high-grade instruments is used in the manufacture of the switches. All switch parts are specially cleaned, and contamination is avoided by use of tweezers, gloves, etc., when making assemblies.

Contactors are hermetically sealed with high quality glass to metal seals.

The stainless steel tube is totally encapsulated in high grade UL approved epoxy to prevent moisture damage and voltage breakdown through the protective coating.

The coils are wound on compact nylon bobbins and molded on to the metal tube to provide minimum power loss. This allows for low coil power required to actuate the contactor. This also enables the units to handle high loads with minimum derating due to higher ambient temperatures. (See de-rating graphs.)

Inert gases internally prevent excessive arcing between the mercury and the electrodes which enables the unit to function for millions of cycles with very low contact resistance, and minimum deterioration of the internal parts.

Available in all standard coil voltages, in single, two and three pole arrangements. Other coil voltages available upon request.

In multiple pole units each tube is actuated by its own coil. This eliminates pull-in variation between contact tubes, assuring consistent switching.

FEATURES

1) ADVANTAGES OVER ELECTROMECHANICAL AND SOLID STATE RELAYS

- A) Superior Performance and Reliability
 - (a) Long life
 - (b) Durable
- B) Compact Size
- C) Low, Predictable Contact Resistance
- D) Reduced RFI for Improved Interface Capability
- E) Handles a Variety of Loads
 - (a) Increases design flexibility
- F) Rapid On-Off Cycling Capability
 - (a) Mercury quickly dissipates contact heat
- G) Low Coil Power Requirements
- H) Minimal Derating Due to Higher Ambient Temperatures
- I) Quiet Action

2) DESIGN & CONSTRUCTION

- A) Contacts are within a hermetically sealed steel body
 - (a) Impervious to adverse conditions
 - (b) No external arcing
- B) Arcing is in a gaseous atmosphere
 - (a) Quenches the arc
 - (b) Extends relay life

- C) Only one moving part (the plunger)
 - (a) No buttons to pit, weld or burn out
- D) One coil for each set of contacts
 - (a) Assures consistent switching
 - (b) Minimizes pull-in variation between contacts
- E) Epoxy encapsulated
 - (a) Moisture resistant
 - (b) High dielectric strength
 - (c) Permanently fixes contacts to coil; eliminating possible misalignment
 - (d) Helps dissipate heat and noise
 - (e) Rugged (impact resistant)

3) BENEFITS

- A) Reduction of Operational and Maintenance costs
- B) Increases Utilization and Productivity of equipment
 - (a) By reducing down-time
- C) Installation and service is a routine operation
 - (a) Simple to install
 - (b) No sophisticated equipment is required
 - (c) Easy to trouble-shoot

**For constant duty applications,
contact the Factory.
(See Glossary)**

SELECTION FACTORS

In order to get the right relay for your job — the relay that will give you the best performance — it is essential that certain information, concerning the conditions under which the relay must perform, be carefully considered. We therefore recommend that answers to the following questions be forwarded to us with your inquiry or order.

1. APPLICATION

- a. What kind of job is relay to do?
- b. Is application special in any way?
- c. Will mounting be stationary?

2. TYPE OF LOAD

- a. What is the voltage in the load circuit?
- b. What is the amperage in the load circuit?
- c. Is it A.C. or D.C.? If A.C., what is the frequency?
- d. What is the nature of the load?
 - Heater load?
 - I amp load?
 - Motor load?
 - Current inrush and running current?
 - Other types of inductive load?

3. CONTACT ARRANGEMENT

- a. Do you require a relay which has a normally open or normally closed contact?

4. DUTY

- a. How often is relay to be operated?
- b. How long is relay to be energized in each operation?

5. TIME DELAY CHARACTERISTICS

- a. What operating time do you want to achieve, maximum and minimum seconds?
- b. Is timing to be on closing or opening of the contacts?

6. COIL RATING

- a. What is your maximum and minimum coil operating voltage or current?
- b. Is coil to be operated from an A.C. or a D.C. circuit? If A.C., what frequency?

7. MOUNTING SPACE

- a. Are there any limitations on space for applying relay?

INDEX

| | |
|--|--------------|
| 30 AMP RELAY | 5 |
| L35/60 AMP NORMALLY OPEN CONTACTORS | 6 |
| 35/60 AMP NORMALLY OPEN CONTACTORS | 7 |
| 35 AMP T - TOP CONTACTORS | 8 |
| 35/60 AMP METAL STRAPPED CONTACTORS (INCLUDING 4 POLE CONTACTOR | 9 |
| 35/60 AMP NORMALLY CLOSED CONTACTORS | 8 |
| 100 AMP CONTACTORS | 10 |
| COIL DATA | 5, 6, 11, 13 |
| DESCRIPTION OF STANDARD MERCURY TO METAL CONTACTORS AND RELAYS | 4 |
| DESCRIPTION OF STANDARD MERCURY TO MERCURY CONTACTORS AND RELAYS | 11 |
| DISPOSAL INFORMATION | 24 |
| FEATURES | 2 |
| FLOAT OPERATIONAL INFORMATION | 18 |
| FORMULAS | 17 |
| FUSING INFORMATION | 17 |
| GENERAL INFORMATION | 2 |
| GLOSSARY OF TERMS | 3 |
| HAZARDOUS LOCATIONS | 7 |
| HIGH VOLTAGE RATINGS | 11 |
| HOW TO ORDER CONTACTORS | 4 |
| HOW TO ORDER LIQUID LEVEL CONTROL FLOATS | 19 |

| | |
|---|--------|
| HOW TO ORDER TILT SWITCHES | 22 |
| HOW TO ORDER TIMER DELAY RELAYS | 11 |
| LIQUID LEVEL CONTROL FLOATS | 18, 19 |
| MOV'S | 17 |
| NARROW ANGLE TILT SWITCHES | 22, 23 |
| OPTIONAL TERMINATIONS AND MOUNTING PLATES | 16 |
| RATINGS MERCURY & SOLID STATE RELAYS/CONTACTORS | 12 |
| SELECTION FACTORS | 2 |
| SIZING RELAYS/CONTACTORS | 17 |
| SOLID STATE RELAYS | 14, 15 |
| SWITCHES | 22, 23 |
| TILT, TIP-OVER & DAMPER SWITCHES | 22, 23 |
| TIME DELAY RELAYS | 11 |
| TORQUE INFORMATION | 17 |
| TWIN FLOAT CONTROLS | 21 |
| TYPICAL APPLICATIONS | 24 |
| VERTICAL LIQUID LEVEL CONTROL SWITCHES | 20 |
| WARRANTY | 24 |
| WIDE ANGLE TILT SWITCHES | 22, 23 |
| WIRING AND FUSING AC RESISTIVE LOADS | 17 |

GLOSSARY OF TERMS & EXPRESSIONS

AMBIENT: The temperature of air or liquid surrounding any electrical part or device.

CONSTANT DUTY: If the contactor will remain "on" in normal use for indefinite periods of time, in excess of 100 hours.

CONTACTOR: 1.) A device for the purpose of repeatedly establishing or interrupting an electric power circuit; 2.) A heavy duty relay used to control electrical circuits. Relays rated at 15 to 30 amps and up are generally referred to as contactors.

CONTACT: 1.) One of the current-carrying parts of a relay, switch or connector that is engaged or disengaged to open or close the associated electrical circuits. 2.) To join two conductors or conducting objects in order to provide a complete path for current flow. 3.) The juncture point to provide the complete path.

CONTACTS: Mercury to Metal: The contacts of a standard mercury displacement relay or contactor. The upper contact is metal and stationary. The lower contact is a pool of mercury that gets displaced by the plunger assembly, thereby coming in contact with the metal electrode during operation. (See page 4.)

Mercury to Mercury: The contacts of a standard mercury timer relay. This contact arrangement utilizes a cup, which has the electrode in it, and is filled with mercury. When the mercury at the bottom of the unit is displaced, it floods over the sides of the cup, completing the circuit. This provides a clean make and break with no chatter and little erosion. (See page 15.)

CONTINUITY: A continuous path for the flow of current in an electric circuit.

DERATE: To reduce the voltage, current, or power rating of a device to improve its reliability or to permit operation at high ambient temperatures.

DIELECTRIC: The insulating material between the metallic elements of an electronic component.

DROP-OUT: The current, voltage, or power value that will cause an energized relays contacts to return to their normal denenergized condition.

GAUSS: The centimeter-gram-second electromagnetic unit of magnetic induction. One gauss represents one maxwell per square centimeter.

HEAT RISE: In a mercury displacement relay; The heat developed from the coil and contacts as a unit.

HERMETIC SEAL: A mechanical or physical closure that is impervious to moisture or gas, including air.

HERTZ: Cycles per second.

INRUSH CURRENT: In a solenoid or coil, the steady-state current drawn from the line with the armature, or plunger, in its maximum open position.

LOAD, CONTACT: The electrical power encountered by a contact set in any particular application.

MAXWELL: The cgs electromagnetic unit of magnetic flux, equal to one gauss per square centimeter, or one magnetic line of force.

OPERATE TIME: In a mercury displacement relay; the amount of time that passes when power is applied to the coil, to when the contacts close in a normally open set of contacts, or when the contacts open in a normally closed set of contacts.

Quick Operate is when the operate time is less than the stated release time. Slow operate is when the operate time is longer than the stated release time.

PLUNGER: In a mercury displacement relay; The device used to displace mercury. The plunger is lighter than mercury so it floats on the mercury. The plunger also contains a magnetic shell or sleeve, so it can be pulled down into the mercury with a magnetic field. The plunger does the same job in a mercury displacement relay as an armature in a mechanical relay.

POLE: 1.) Output terminals on a switch. 2.) A single set of contacts; (i.e., three sets of contacts equal three poles.)

POWER FACTOR: Ratio of the actual power of an alternating or pulsating current to the apparent power.

PULL-IN: (Pick-up): The minimum current, voltage, power or other value which will trip a relay or cause it to operate.

RELAY: An electromechanical or electronic device in which continuity is established or interrupted in one circuit by a control circuit. Typically used to switch large currents by supplying relatively small currents to the control circuit. Also see Contactor.

RELEASE TIME: In a mercury displacement relay; The amount of time that passes when power is removed from the coil, until the contacts of a normally open unit reopen, or when contacts of a normally closed unit recloses.

Quick Release is when the release time is less than the stated operate time. Slow Release is when the release time is longer than the stated operate time.

STEADY-STATE: A condition in which circuit values remain essentially constant, occurring after all initial transients or fluctuating conditions have settled down.

TRANSIENT (Transient Phenomena): Rapidly changing action occurring in a circuit during the interval between closing of a switch and settling to steady-state conditions, or any other temporary actions occurring after some change in a circuit or its constants.

VOLT-AMPERE: A unit of apparent power in an AC circuit containing reactance. It is equal to the potential in volts multiplied by the current, in amperes, without taking phase into consideration.

VOLTAGE SPIKES: An abrupt transient which comprises part of a pulse but exceeds its average amplitude considerably.


VOLTAGE WITHSTAND: The amount of electromotive force (volts) that can be applied to two points before a current will flow (leakage or breakdown.)

WATT: A unit of electrical power. One watt is expended when one ampere of direct current flows through a resistance of one ohm. In an AC circuit, the true power in watts is effective volt-amperes multiplied by the circuit power factor. There are 746 watts in one horsepower.

ABBREVIATIONS

| | | | |
|-----------------|----------------------------|-------------|-----------------|
| A.C. | Alternating Current | Hg | Mercury |
| D.C. | Direct Current | Hz | Hertz |
| M.D.R. | Mercury Displacement Relay | N.C. | Normally Closed |
| D.P.S.T. | Double Pole Single Throw | N.O. | Normally Open |
| S.P.S.T. | Single Pole Single Throw | Q | Quick |
| T.P.S.T. | Triple Pole Single Throw | S | Slow |

STANDARD MERCURY TO METAL CONTACTORS & RELAYS

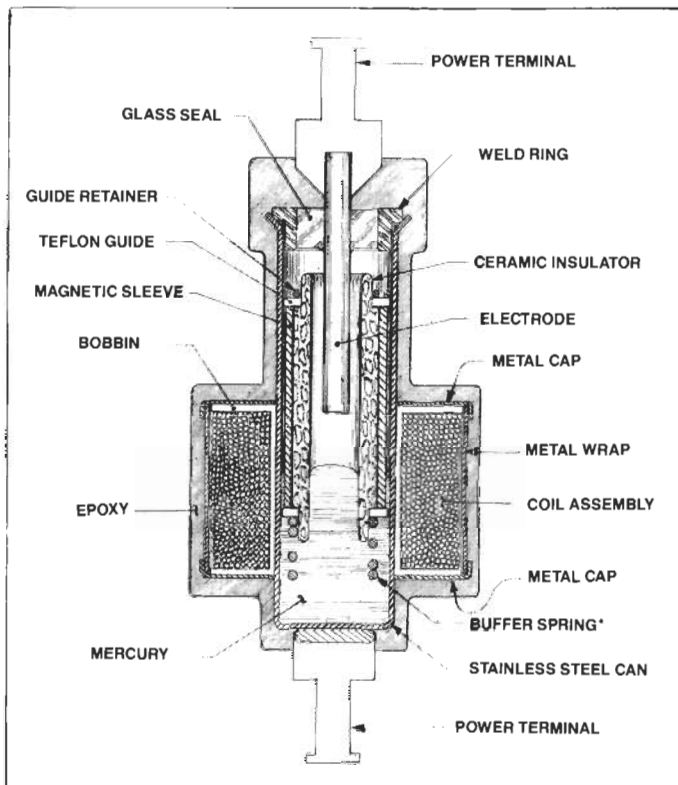

DESCRIPTION

MERCURY TO METAL CONTACTOR: The load terminals are isolated from each other by the glass in the hermetic seal. "The plunger assembly," which includes the ceramic insulator, the magnetic sleeve and related parts, floats on the mercury pool. When the coil is powered causing a magnetic field, the plunger assembly is pulled down into the mercury pool which is in turn displaced and moved up to make contact with the electrode, closing the circuit between the top and bottom load terminal which is connected to the stainless steel can.

To make the unit function as a "Hybrid" time delay we add a solid state circuit to the coil to delay the power to the coil. (See page 14.)

*For constant duty applications.
A return spring is used in place of the buffer spring.
Contact the factory.

HOW TO ORDER

SPECIFY AS SHOWN BELOW

EXAMPLE #1

NUMBER OF POLES: 2, 3, 4 OR BLANK IF SINGLE POLE (4 POLE ON 35 & 60 ONLY)

CONTACTS: "NO" = NORMALLY OPEN "NC" = NORMALLY CLOSED (H NOT SPECIFIED IN SUFFIX)

COIL VOLTAGE FOLLOWED BY "A" FOR ALTERNATING CURRENT OR "D" FOR DIRECT CURRENT.

OPTIONS

335NO-120A THN-18

SEE NOTE 1
BRACKET OTHER THAN STANDARD "A, B, N, P or U" ON 35 & 60-AMP UNITS (BLANK IF STANDARD BRACKET IS USED.)
SEE PAGE 12.

"H" IS FOR LOADS OTHER THAN AC
RESISTIVE & TUNGSTEN ON NORMALLY OPEN UNITS.

"T" FOR TOP TERMINATION, "TS" FOR TOP SCREW TERMINATION ON 35-AMP UNITS. (BLANK IF STANDARD TERMINATION.) SEE PAGES 7 & 12.

A.C. RESISTIVE LOAD RATING (30, 35, 60, or 100-AMP.)

NOTE: 1) Other designations are -1 thru -99. These are suffix numbers, and are reserved for units with special detail, construction and/or features. -11 MOV on coil (page 13), -13 MOV & metal strap, -17 DIN rail mount (page 12), -18 metal strap (page 8), -20 DIN rail & metal strap. (See Example #2).

EXAMPLE #2

100NO-120AH-6A


The -6A stands for HIGH VOLTAGE contactor.
Used in ultraviolet curing ovens and other high voltage applications.
See page 10 for ratings.

30-AMP NORMALLY OPEN CONTACTORS

GENERAL INFORMATION




SINGLE POLE

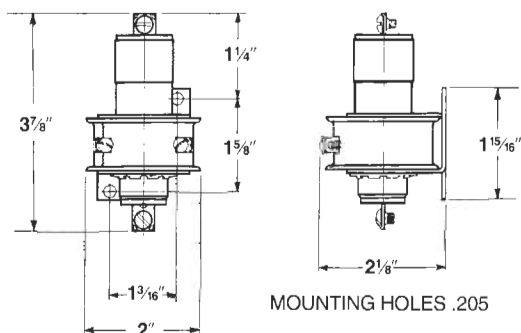


The 30 Amp model is designed to save space and simplify mounting methods. The standard mounting bracket on the three pole model allows the unit to be mounted in standard 3" snap track channel. If you do not use snap track mounting, the standard three pole bracket has key hole slots for easy mounting in any panel arrangement. The universal three pole mounting bracket has various mounting holes and key hole slots to meet a variety of mounting centers.


The 30 Amp series is a more compact line with a well proven switch which is the heart of mercury relays. It is the same switch design that is in our 35 and 60 Amp encapsulated MDR's, which have withstood the test of time and millions of cycles in many different applications.



TWO POLE STANDARD MOUNT

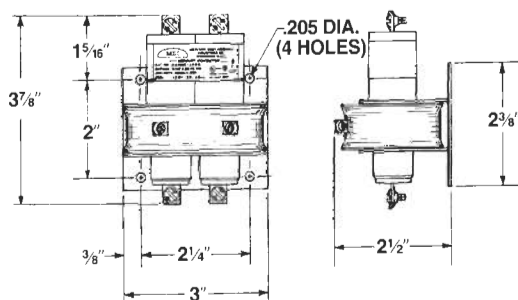

TWO POLE UNIVERSAL MOUNT

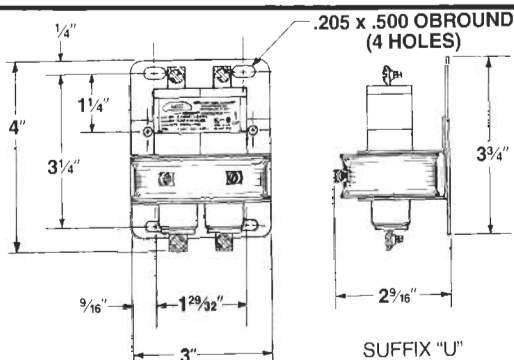

TYPICAL SPECIFICATIONS


- ON NORMALLY OPEN UNITS:
OPERATE TIME: 50 milliseconds
RELEASE TIME: 80 milliseconds
- CONTACT RESISTANCE:
30-AMP = .003 ohm*
- DIELECTRIC WITHSTAND:
2500 VAC RMS
- LONGEVITY:
MILLIONS OF CYCLES
- TEMPERATURE RANGE:
-35°C TO 85°C
- COIL TERMINALS:
#6 BINDING HEAD SCREWS
- LOAD TERMINALS:
#8 BINDING HEAD SCREWS
- UL LISTING: FILE #E62767
- C.S.A.: FILE #LR41198
- TO ORDER SEE PAGE 4




* AFTER CYCLING UNDER LOAD.




THREE POLE STANDARD MOUNT

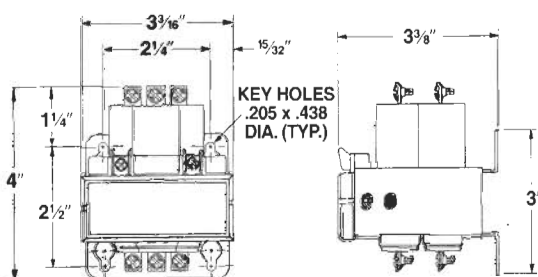

SNAP TRACK MOUNT




THREE POLE UNIVERSAL MOUNT

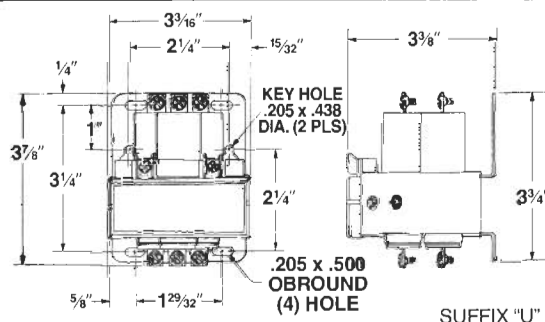

COIL DATA

| CATALOG NO. | COIL RESISTANCE (OHMS) | COIL CURRENT (MILLIAMPS) | VA | WATTS |
|-------------|------------------------|--------------------------|------|-------|
| 30NO-24D | 180 | 133 | 3.2 | 3.2 |
| 230NO-24D | 131 | 188 | 4.5 | 4.5 |
| 330NO-24D | 73 | 329 | 7.9 | 7.9 |
| 30NO-24A | 28 | 316 | 7.6 | 2.8 |
| 230NO-24A | 12.5 | 610 | 14.6 | 4.7 |
| 330NO-24A | 7.6 | 815 | 19.6 | 5.0 |
| 30NO-120A | 725 | 65 | 7.8 | 3.1 |
| 230NO-120A | 317 | 118 | 14.2 | 4.4 |
| 330NO-120A | 210 | 163 | 19.6 | 5.6 |
| 30NO-220A | 3150 | 27 | 6.0 | 2.2 |
| 230NO-220A | 1300 | 56 | 12.3 | 4.1 |
| 330NO-220A | 728 | 86 | 18.9 | 5.5 |

L35/L60-AMP NORMALLY OPEN CONTACTS

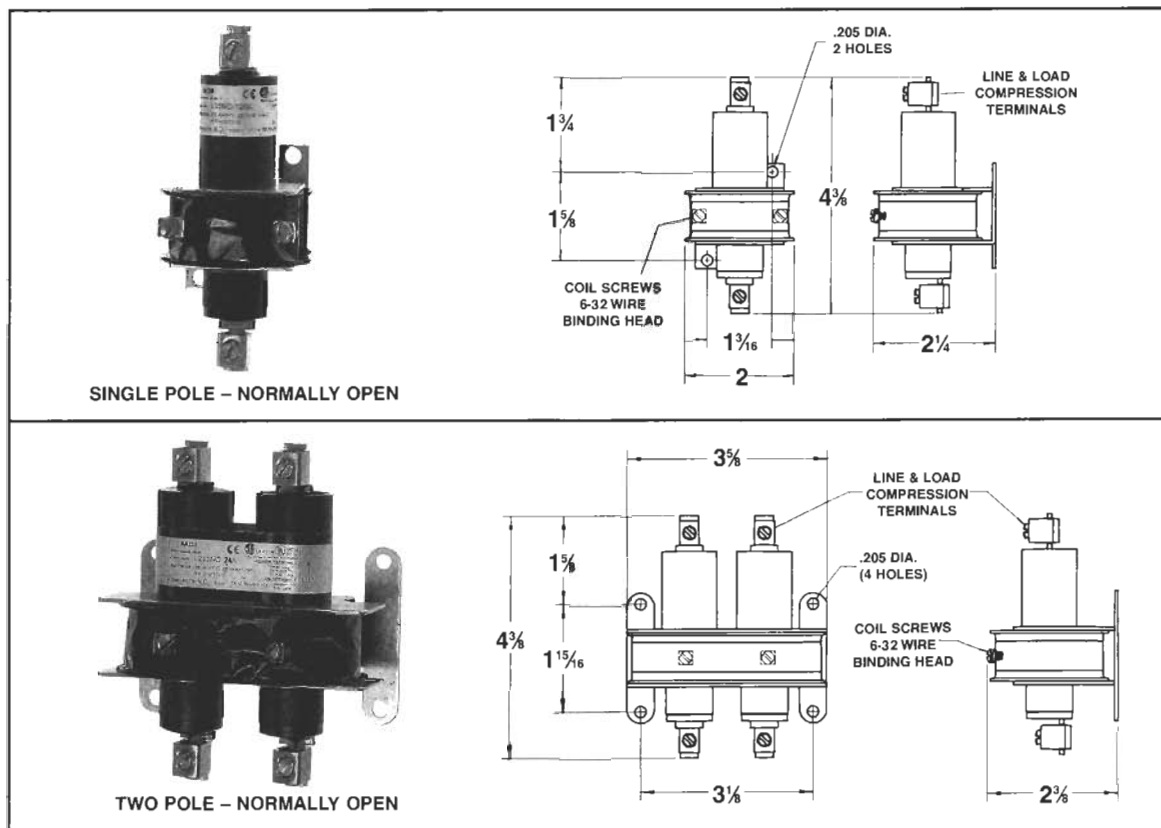

The "L" version of the 35 and 60 amp normally open contactors are designed and manufactured to the same high quality specifications as the standard 35 and 60 amp models. The contactor switch is the same well proven design that has been manufactured since 1975. The mounting centers and physical size are identical to the standard single and two pole 35 and 60 amp molded versions.

The new design provides a cleaner appearance, and is a more economical design. It is available in the single and two pole models only, with top and bottom load terminals or with lead wires. Noted are the typical specifications and UL and CSA file numbers.

COIL DATA APPLIES TO L35 AND L60 AMP SERIES. TO ORDER THE L60 SERIES, CHANGE THE CATALOG NUMBER FROM L35NO-_____ TO L60NO-_____

COIL DATA

| CATALOG NO. | COIL RESISTANCE (OHMS) | COIL CURRENT (MILLIAMPS) | VA | WATTS |
|-------------|------------------------|--------------------------|------|-------|
| L35NO-24D | 188 | 135 | 3.3 | 3.3 |
| L235NO-24D | 92 | 260 | 6.2 | 6.2 |
| L35NO-24A | 28 | 325 | 7.8 | 3.0 |
| L235NO-24A | 10.3 | 660 | 15.8 | 4.5 |
| L35NO-120A | 725 | 75 | 9.0 | 4.0 |
| L235NO-120A | 350 | 115 | 13.8 | 4.6 |
| L35NO-220A | 3150 | 27 | 5.9 | 2.2 |
| L235NO-220A | 1000 | 69 | 15.2 | 4.8 |

TYPICAL SPECIFICATIONS

- ON NORMALLY OPEN UNITS:
OPERATE TIME: 50 milliseconds
RELEASE TIME: 80 milliseconds
- CONTACT RESISTANCE:
35-AMP = .003 ohm*
60-AMP = .002 ohm*
- DIELECTRIC WITHSTAND:
2500 VAC RMS
- LONGEVITY:
MILLIONS OF CYCLES
- TEMPERATURE RANGE:
-35°C TO 85°C
- COIL TERMINALS:
#6 BINDING HEAD SCREWS
- LOAD TERMINALS:
PRESSURE CONNECTORS FOR
A.W.G. #4-#14 ON 35-AMP AND
A.W.G. #2-#8 ON 60-AMP UNITS
- UL LISTING:
FILE #E62767 FOR L35 AND
L60-AMP N.O. UNITS 1-2 POLES
- C.S.A.:
FILE #LR41198 FOR L35 AND
L60-AMP N.O. UNITS 1-2 POLES





*AFTER CYCLING UNDER LOAD

35 / 60-AMP NORMALLY OPEN CONTACTORS


TYPICAL SPECIFICATIONS




SINGLE POLE NORMALLY OPEN

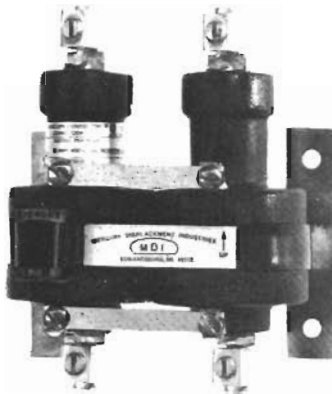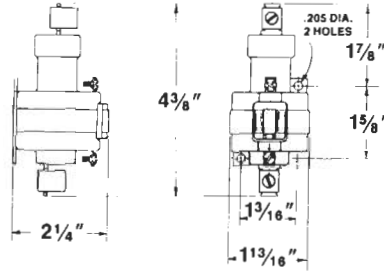

TWO POLE NORMALLY OPEN

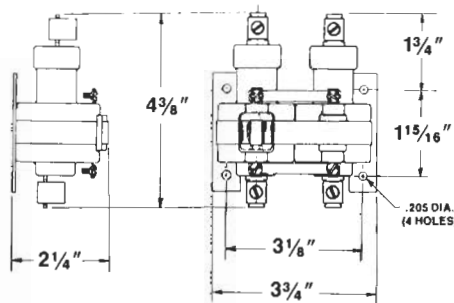

THREE POLE NORMALLY OPEN

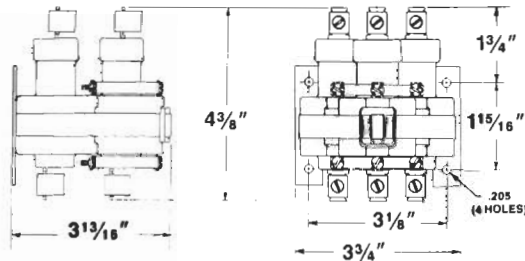


- ON NORMALLY OPEN UNITS:
OPERATE TIME: 50 milliseconds
RELEASE TIME: 80 milliseconds
- ON NORMALLY CLOSED UNITS:
OPERATE TIME: 30 milliseconds
RELEASE TIME: 35 milliseconds
- CONTACT RESISTANCE:
35-AMP = .003 ohm*
60-AMP = .002 ohm*
- DIELECTRIC WITHSTAND:
2500VAC RMS
- LONGEVITY:
MILLIONS OF CYCLES
- TEMPERATURE RANGE:
-35°C TO 85°C
- COIL TERMINALS:
#6 BINDING HEAD SCREWS
- LOAD TERMINALS:
PRESSURE CONNECTORS
FOR A.W.G. #4-#14 ON 35-AMP
UNITS AND A.W.G. #2-#8 ON
60-AMP UNITS
- RATINGS:
SEE PAGE 10 FOR CONTACTS
SEE PAGE 11 FOR COIL DATA
- UL LISTING: FILE #E62767 FOR
35 AND 60-AMP N.O. UNITS
1-4 POLES
- C.S.A.: FILE #LR41198 FOR
35 AND 60-AMP N.O. UNITS
(HEATER LOADS) 1-3 POLES
- TO ORDER SEE PAGE 4
- AUXILIARY DEVICES FOR USE IN
HAZARDOUS LOCATIONS.
UL FILE #E71867 N.O. UNITS
APPROVED FOR CLASS 1, GROUPS
A, B, C AND D, DIVISION 2 ONLY.
TO ORDER FOR HAZARDOUS LOCA-
TIONS ADD THE SUFFIX -X TO
PART NUMBER




STANDARD MOUNTING SHOWN—SEE PAGE 16 FOR OPTIONS.

* AFTER CYCLING UNDER LOAD.


35-AMP NORMALLY OPEN
LOAD DE-RATING DUE TO AMBIENT TEMPERATURE

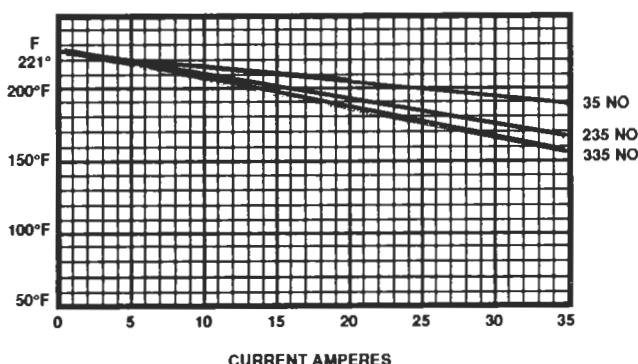



60-AMP NORMALLY OPEN
LOAD DE-RATING DUE TO AMBIENT TEMPERATURE

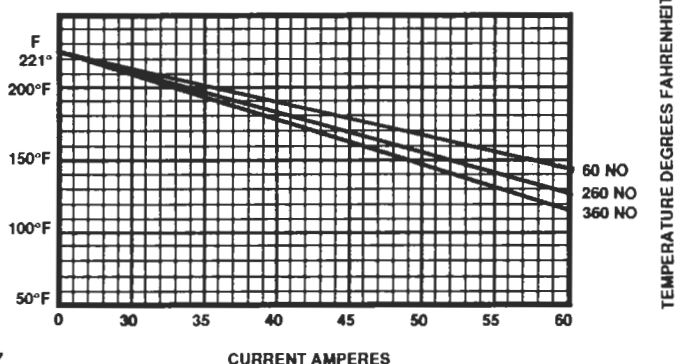



35-AMP T-TOP CONTACTORS

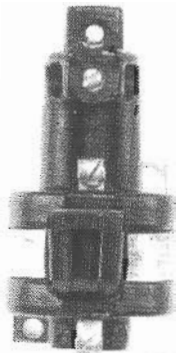


SINGLE POLE — NORMALLY OPEN

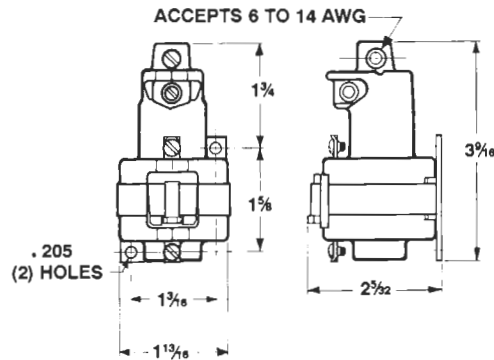

TWO POLE — NORMALLY OPEN

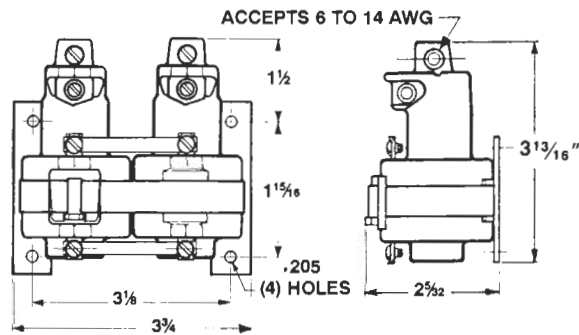

THREE POLE — NORMALLY OPEN

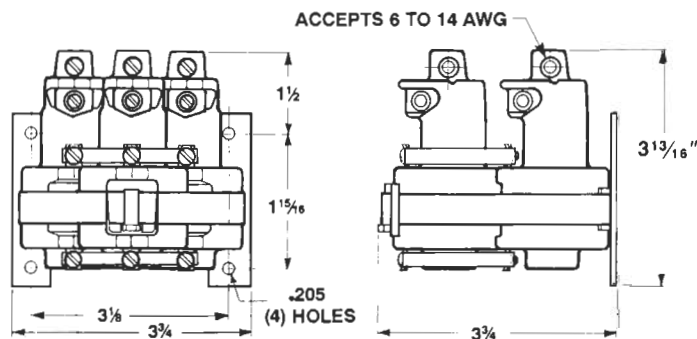

FILE # E-62767





FILE # LR-41198



35/60-AMP NORMALLY CLOSED CONTACTORS

SIMILAR CONSTRUCTION AS THE NORMALLY OPEN UNITS BUT WITH THE COIL POSITIONED CLOSER TO THE TOP OF THE CONTACTOR AND A NORMALLY CLOSED CONTACTOR IN PLACE OF A NORMALLY OPEN CONTACTOR. ALSO AVAILABLE IN THREE AND FOUR POLE UNITS.

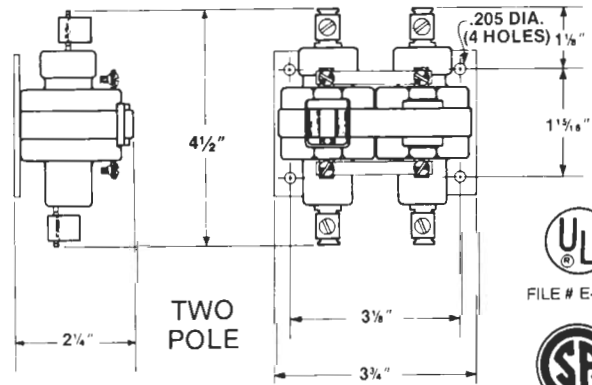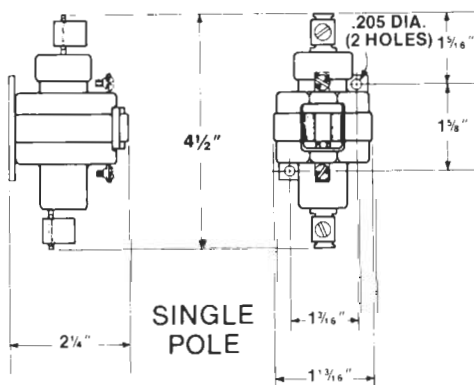


FILE # E-62767





FILE # LR-41198

35/60-AMP METAL STRAPPED CONTACTORS


Add suffix -18 to catalog number for metal strap, i.e. 335NO-120A-18

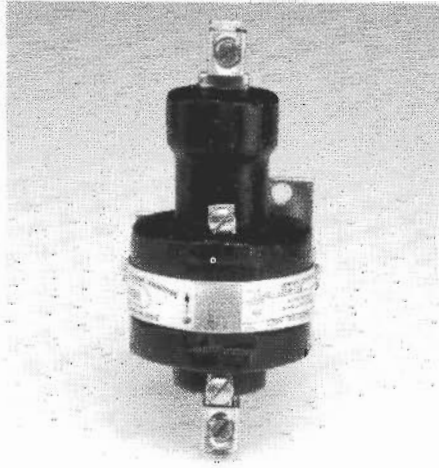

SINGLE POLE — NORMALLY OPEN

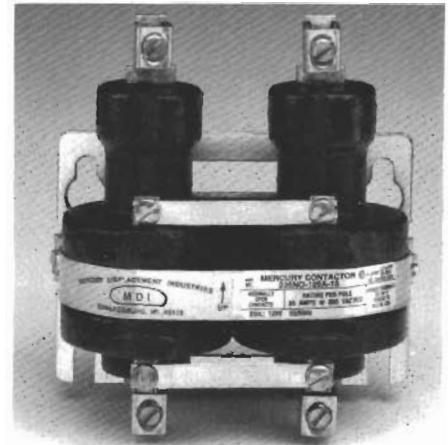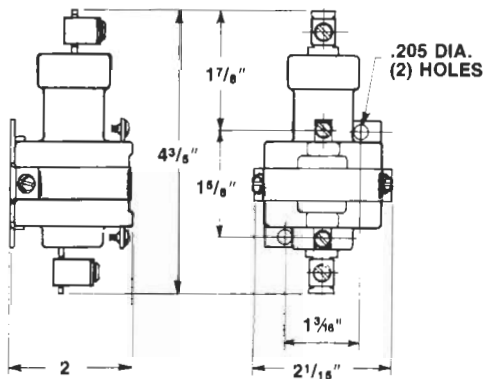


TWO POLE — NORMALLY OPEN


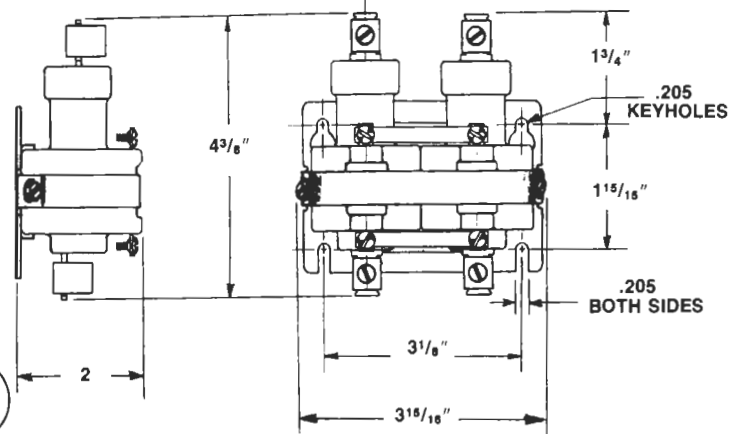


FILE # E-62767 FILE # LR-41198


CE

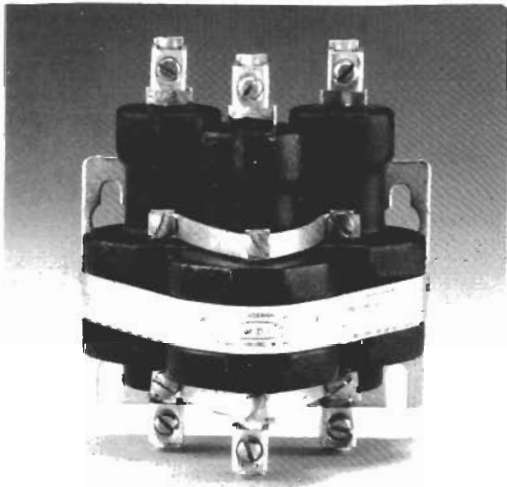

THREE POLE — NORMALLY OPEN

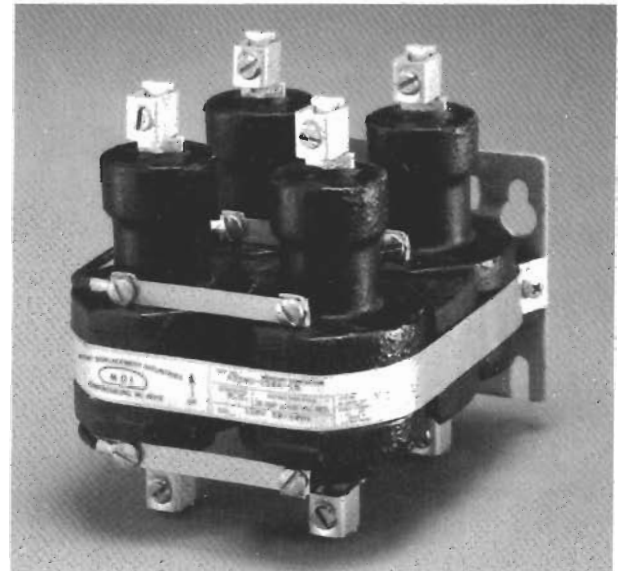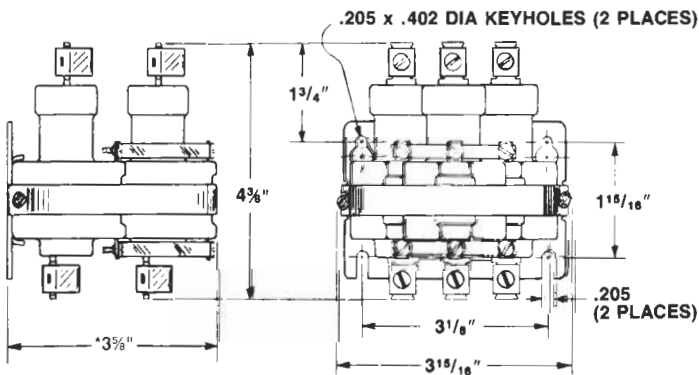

FOUR POLE — NORMALLY OPEN

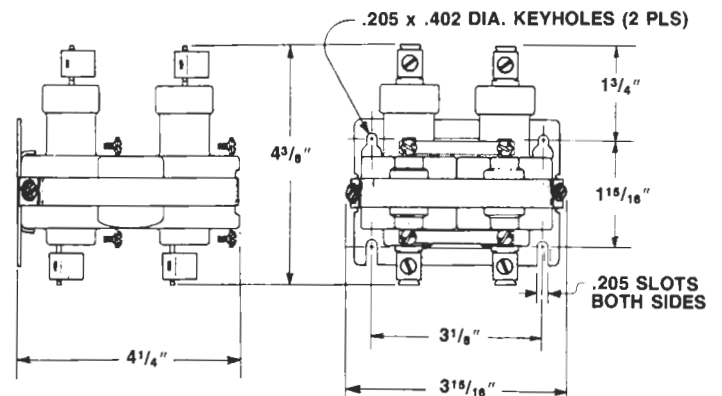


100-AMP CONTACTORS




NORMALLY
OPEN
UNIT




NORMALLY
CLOSED
UNIT

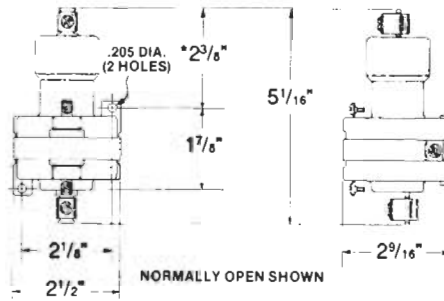


*THIS DIMENSION IS 1 1/2" FOR NORMALLY
CLOSED SINGLE POLE UNITS.




TWO POLE NORMALLY OPEN

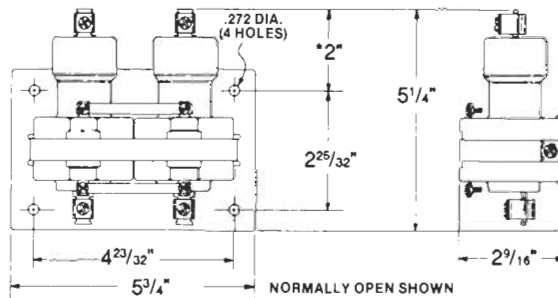

*THIS DIMENSION IS 5/8" ON NORMALLY
CLOSED TWO POLE UNITS.




THREE POLE NORMALLY OPEN

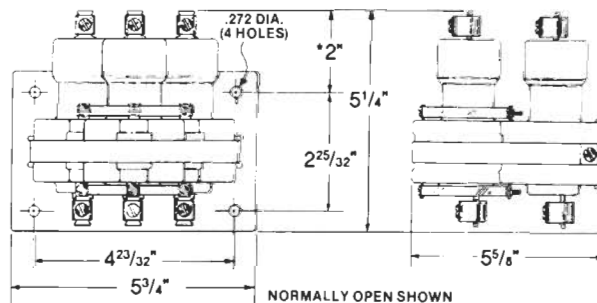


*THIS DIMENSION IS 5/8" ON NORMALLY
CLOSED THREE POLE UNITS.

TYPICAL SPECIFICATIONS


- ON NORMALLY OPEN UNITS:
OPERATE TIME
50 milliseconds
RELEASE TIME:
80 milliseconds
- ON NORMALLY CLOSED UNITS:
OPERATE TIME:
45 milliseconds
RELEASE TIME:
60 milliseconds
- CONTACT RESISTANCE:
.001 ohm*
- DIELECTRIC WITHSTAND:
2500VAC RMS
- LONGEVITY:
MILLIONS OF CYCLES
- TEMPERATURE RANGE:
-35°C TO 85°C
- COIL TERMINALS:
#6 BINDING HEAD SCREWS
- LOAD TERMINALS:
PRESSURE CONNECTORS.
STANDARD ACCEPTS A.W.G.
#2 to #12. FOR A.W.G. #1 to #8,
ADD SUFFIX -5 to CATALOG
NUMBER (i.e. 100NO-120A-5)
- RATINGS:
Derate over 240VAC Res.
See Page 10 for Contacts.
See Page 11 for Coil Data.
- TO ORDER SEE PAGE 4.
-  FOR UL RATINGS SEE
LOAD CHART. PAGE 10

* AFTER CYCLING UNDER LOAD

100-AMP NORMALLY OPEN
LOAD DE-RATING DUE TO AMBIENT TEMPERATURE

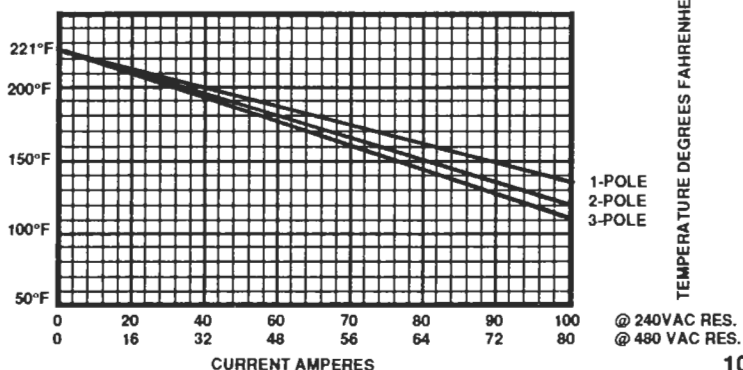

100-AMP NORMALLY CLOSED
LOAD DE-RATING DUE TO AMBIENT TEMPERATURE

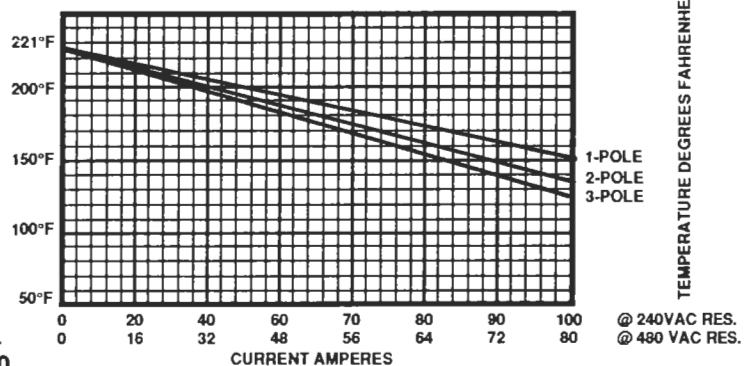


HIGH VOLTAGE CONTACTORS

For UV Curing, and Various High Voltage applications. Available in Single Pole, Normally Open, and Normally Closed Units. The coils utilize 6-32 Wire Binding Screws, and the Contacts use Compression type terminals for #4 thru #14 AWG wire.


RATINGS ARE: 10 AMPS @ 3500 VAC, 15 AMPS @ 2500 VAC
AC INDUCTIVE - Power Factor .7 or Greater.

COIL DATA

| Catalog Number | Coil Voltage | Resistance | Current Draw | Wattage | V.A. |
|----------------|--------------|---------------|--------------|---------|------|
| 100NC-24D-6A | 24VDC | 121 Ω | 198 ma | 4.8 | 4.8 |
| 100NC-120A-6A | 120VAC | 380 Ω | 125 ma | 5.9 | 15.0 |
| 100NC-220A-6A | 220VAC | 1400 Ω | 76 ma | 8.1 | 16.7 |
| 100NO-12DH-6A | 12VDC | 16 Ω | 750 ma | 9.0 | 9.0 |
| 100NO-24AH-6A | 24VAC | 16 Ω | 760 ma | 9.2 | 18.2 |
| 100NO-24DH-6A | 24VDC | 65 Ω | 370 ma | 8.9 | 8.9 |
| 100NO-120AH-6A | 120VAC | 380 Ω | 158 ma | 9.5 | 19.0 |
| 100NO-220AH-6A | 220VAC | 1400 Ω | 90 ma | 11.3 | 19.8 |

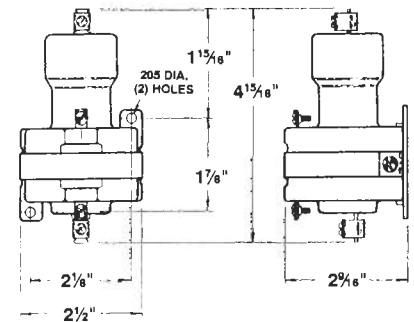

NORMALLY OPEN

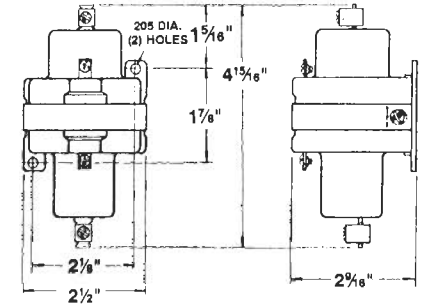



NORMALLY CLOSED

TIME DELAY RELAYS


MDI's time delay **CONTACT ACTION** is designated as follows:

- DOO: Delay on operate, normally open
- DORO: Delay on operate and release, normally open
- DRO: Delay on release, normally open
- DORC: Delay on operate and release, normally closed
- DRC: Delay on release, normally closed

HOW TO ORDER SPECIFY AS SHOWN BELOW

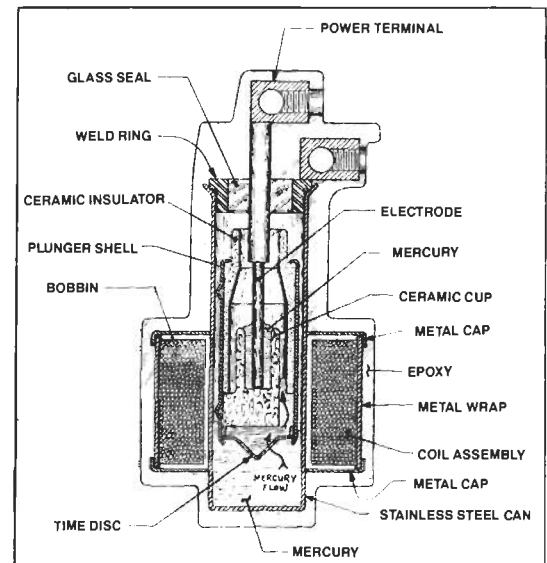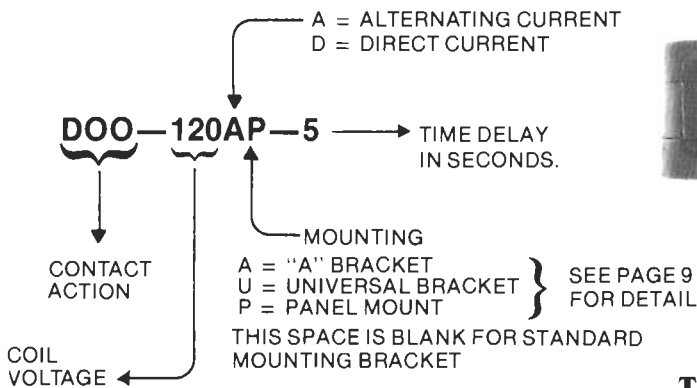

TIME DELAY RELAYS Are available with delays of up to 15 seconds on normally open units, and 4 seconds on normally closed units. The timing limitation depends on the contact action required. A time delay function is accomplished in this unit by sizing a hole in the time disc that will control the rate of the mercury flow. This controls the time it will take from the instant the coil is powered until the mercury pools make contact with each other, closing the circuit between the load terminals. Typical contact ratings 10 AMP @ 120 VAC. Pilot duty rating 720 VA. Common coil voltages are available. Standard load terminals are compression type. Coil terminals use #6 binding head screws.

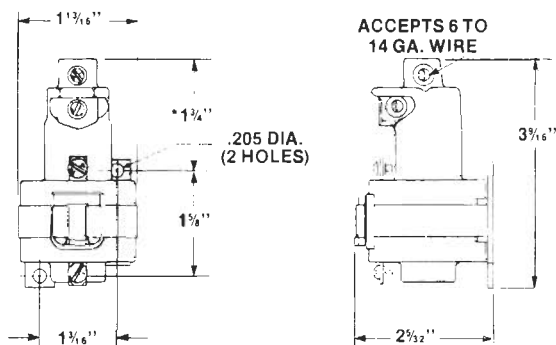


COIL DATA PER POLE RATINGS ON STANDARD COILS

| CATALOG NUMBER | VOLTAGE | RESISTANCE (D.C. OHMS) | CURRENT (MILLIAMPERES) | VOLT AMPERES V/A | POWER (WATTS) |
|-------------------------------|---------------|---------------------------|---------------------------|---------------------|------------------|
| 30 AMP SERIES (SEE PAGE 5) | SEE PAGE 5 | SEE PAGE 5 | SEE PAGE 5 | SEE PAGE 5 | SEE PAGE 5 |
| 35NO-24A | 24 VAC | 50 | 242 | 5.8 | 2.9 |
| 35NO-120A | 120 VAC | 1250 | 53 | 6.4 | 3.5 |
| 35NO-208A | 208 VAC | 3400 | 30 | 6.2 | 3.1 |
| 35NO-220A | 220 VAC | 4800 | 28 | 6.2 | 3.8 |
| 35NO-277A | 277 VAC | 7900 | 20 | 5.5 | 3.2 |
| 35NO-480A | 480 VAC | 20000 | 12 | 5.9 | 3.0 |
| 35NO-6D | 6 VDC | 13 | 462 | 2.8 | 2.8 |
| 35NO-12D | 12 VDC | 36 | 333 | 4.0 | 4.0 |
| 35NO-24D | 24 VDC | 176 | 136 | 3.3 | 3.3 |
| 35NO-48D | 48 VDC | 860 | 56 | 2.7 | 2.7 |
| 35NO-125D | 125 VDC | 3400 | 37 | 4.6 | 4.6 |
| 35NO-250D | 250 VDC | 14800 | 17 | 4.2 | 4.2 |
| 35NC-24A | 24 VAC | 36 | 310 | 7.4 | 3.5 |
| 35NC-120A | 120 VAC | 860 | 65 | 7.8 | 3.6 |
| 35NC-220A | 220 VAC | 3400 | 31 | 6.8 | 3.3 |
| 35NC-12D | 12 VDC | 36 | 333 | 4.0 | 4.0 |
| 35NC-24D | 24 VDC | 176 | 136 | 3.3 | 3.3 |
| 35NC-48D | 48 VDC | 560 | 86 | 4.1 | 4.1 |
| 35NC-125D | 125 VDC | 3400 | 37 | 4.6 | 4.6 |
| 60NO-24A | 24 VAC | 50 | 259 | 6.2 | 3.4 |
| 60NO-120A | 120 VAC | 1250 | 48 | 5.8 | 2.9 |
| 60NO-208A | 208 VAC | 3400 | 30 | 6.2 | 3.1 |
| 60NO-220A | 220 VAC | 4800 | 27 | 5.9 | 3.5 |
| 60NO-277A | 277 VAC | 7900 | 19 | 5.3 | 2.9 |
| 60NO-480A | 480 VAC | 20000 | 12 | 5.8 | 2.9 |
| 60NO-12D | 12 VDC | 36 | 333 | 4.0 | 4.0 |
| 60NO-24D | 24 VDC | 176 | 136 | 3.3 | 3.3 |
| 60NO-48D | 48 VDC | 636 | 75 | 3.6 | 3.6 |
| 60NO-125D | 125 VDC | 3400 | 37 | 4.6 | 4.6 |
| 60NO-240D | 250 VDC | 14800 | 17 | 4.3 | 4.3 |
| 60NC-24A | 24 VAC | 36 | 325 | 7.8 | 5.3 |
| 60NC-120A | 120 VAC | 860 | 69 | 8.3 | 4.1 |
| 60NC-220A | 220 VAC | 3400 | 34 | 7.5 | 3.9 |
| 60NC-277A | 277 VAC | 7900 | 26 | 7.3 | 5.5 |
| 60NC-12D | 12 VDC | 36 | 333 | 4.0 | 4.0 |
| 60NC-24D | 24 VDC | 140 | 171 | 4.1 | 4.1 |
| 60NC-48D | 48 VDC | 560 | 86 | 4.1 | 4.1 |
| 60NC-125D | 125 VDC | 3400 | 37 | 4.6 | 4.6 |
| 100NO-24A | 24 VAC | 16 | 646 | 15.5 | 6.7 |
| 100NO-120A | 120 VAC | 380 | 137 | 16.4 | 7.1 |
| 100NO-220A | 220 VAC | 1400 | 73 | 16.1 | 7.5 |
| 100NO-277A | 277 VAC | 2400 | 55 | 15.2 | 7.3 |
| 100NO-480A | 480 VAC | 6300 | 35 | 16.8 | 7.7 |
| 100NO-24D | 24 VDC | 65 | 369 | 8.9 | 8.9 |
| 100NO-48D | 48 VDC | 350 | 137 | 6.6 | 6.6 |
| 100NO-125D | 125 VDC | 2400 | 52 | 6.5 | 6.5 |
| 100NC-24A | 24 VAC | 16 | 515 | 12.4 | 4.2 |
| 100NC-120A | 120 VAC | 380 | 110 | 13.2 | 4.6 |
| 100NC-208A | 220 VAC | 1400 | 55 | 11.4 | 4.2 |
| 100NC-240A | 240 VAC | 1685 | 49 | 11.8 | 4.0 |
| 100NC-480A | 480 VAC | 6300 | 27 | 13.0 | 4.6 |
| 100NC-12D | 12 VDC | 28 | 433 | 5.2 | 5.2 |
| 100NC-24D | 24 VDC | 121 | 198 | 4.8 | 4.8 |
| 100NC-48D | 48 VDC | 380 | 126 | 6.1 | 6.1 |
| 100 NC-125D | 125 VDC | 2400 | 52 | 6.5 | 6.5 |

- NOTES: 1. INRUSH CURRENT=1.5 TIMES THE STEADY STATE CURRENT. (NO INRUSH ON DC COILS).
2. MINIMUM OPERATING VOLTAGE 90% OF NOMINAL VOLTAGE.
3. ALL A.C. VOLTAGES ARE AT 50/60 Hz.
4. FOR OTHER COIL VOLTAGES CONTACT FACTORY.
5. RATINGS SHOWN ARE PER POLE (COILS ARE IN PARALLEL).

SOLID STATE RELAYS

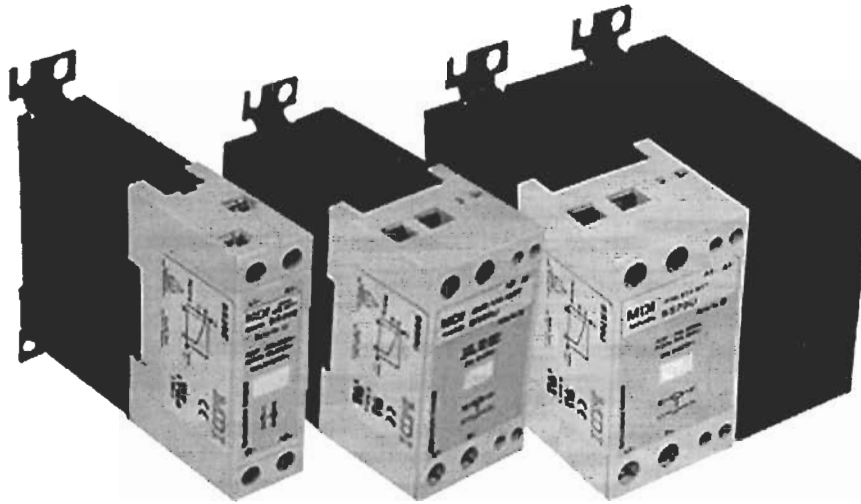

20, 30, 50 & 70 AMP RELAYS WITH INTEGRATED HEATSINKS

- AC Semiconductor contactor
- Zero switching
- Direct-Copper bonding (DCB) technology
- LED indication
- Cage Clamp terminals
- 2 input ranges: 4-32 VDC and 24-275 VAC/24-48 VDC
- Operational ratings 20 - 70 AACrms and 600 VAC
- Non-repetitive voltage: up to 1200 Vp
- Opto isolation > 4000 VACrms
- Operating temperature -30° to +80° C
- Junction temperature 125° C on 20, 30 and 70
- Junction temperature 120° C and 50

SELECTION GUIDE


| MODEL | CONTROL VOLTAGE | RATED CURRENT |
|--------|----------------------|---------------|
| SS20AE | 24-275 VAC 24-48 VDC | 20 AMP |
| SS20AU | 24-275 VAC 24-48 VDC | 20 AMP |
| SS20DE | 4-32 VDC | 20 AMP |
| SS20DU | 4-32 VDC | 20 AMP |
| SS30AU | 24-275 VAC 24-48 VDC | 30 AMP |
| SS30DU | 4-32 VDC | 30 AMP |
| SS50AE | 24-275 VAC 24-48 VDC | 50 AMP |
| SS50AU | 24-275 VAC 24-48 VDC | 50 AMP |
| SS50DE | 4-32 VDC | 50 AMP |
| SS50DU | 4-32 VDC | 50 AMP |
| SS70AU | 24-275 VAC 24-48 VDC | 70 AMP |
| SS70DU | 4-32 VDC | 70 AMP |

PRODUCT DESCRIPTION: MDI Solid State Relays are advantageous in industrial heating applications requiring high cycle rates. These relays have integral heat sinks and are ready to mount on chassis or DIN-rail.

The standard housing dimensions enable straightforward replacement of alternative products and allow for two standard


terminal configurations. Cage clamp terminals are used to ensure secure load connection.

An LED indicates the status of the control input. The superior heat-transfer efficiency combined with a robust power management system makes this a high reliability product that can meet the most stringent functional requirements.

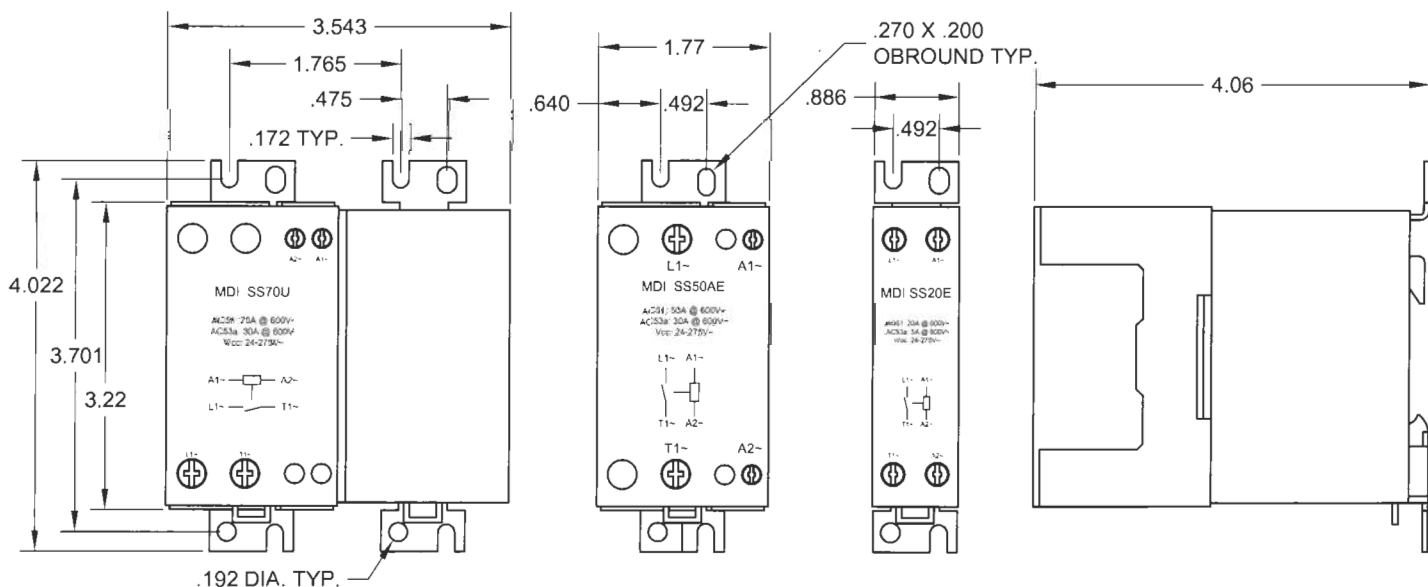


PANEL, TERMINAL INFORMATION & DERATING CHARTS

Panel Mounting

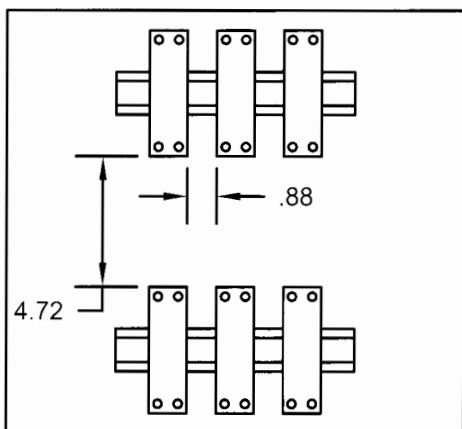


SS70

Terminal Layout


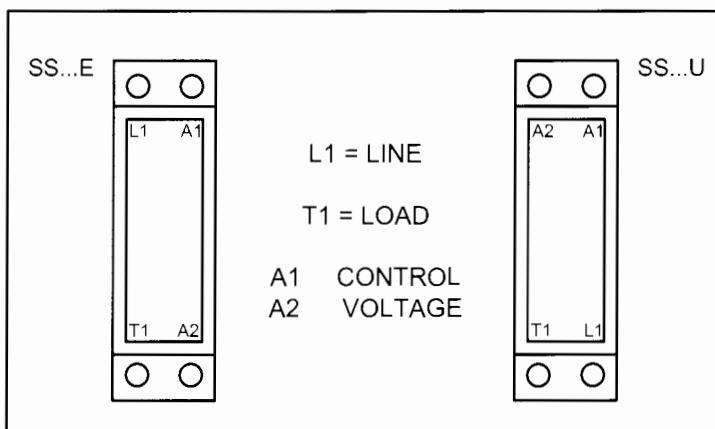


SS50



SS20/SS30

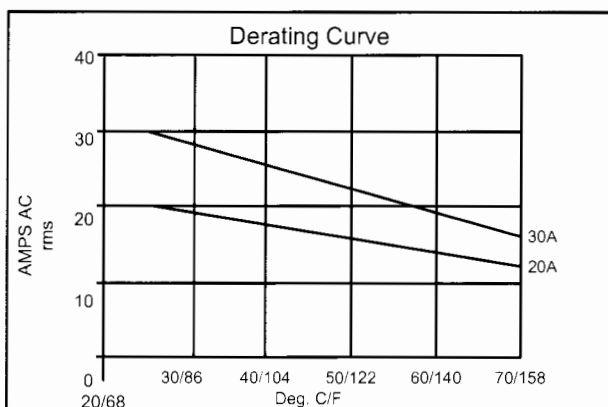


SS20/SS30

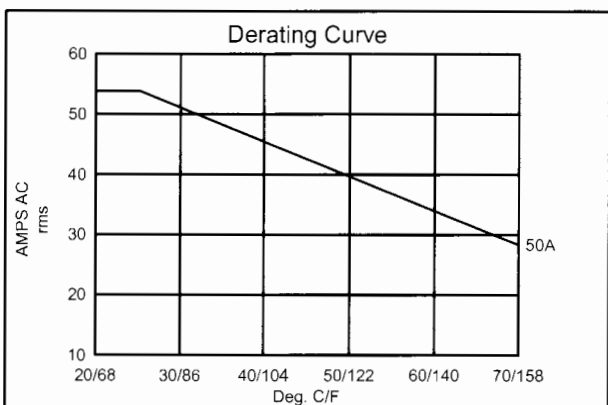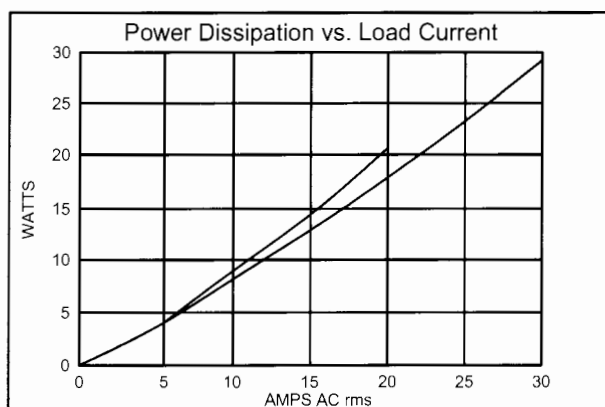

SS50

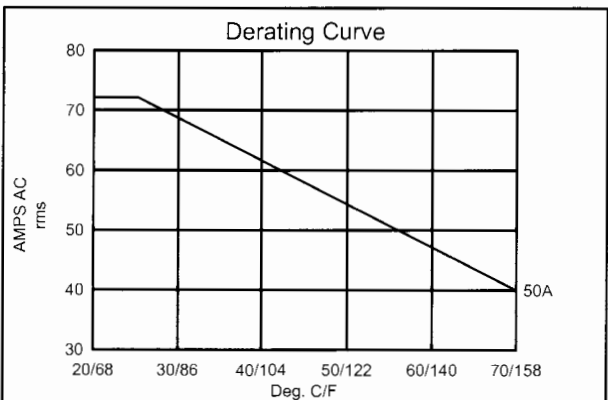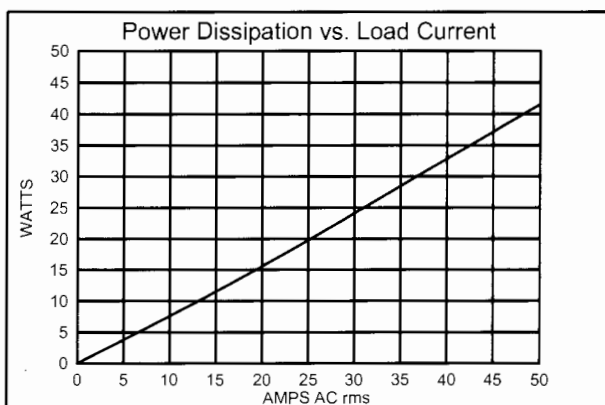

SS70

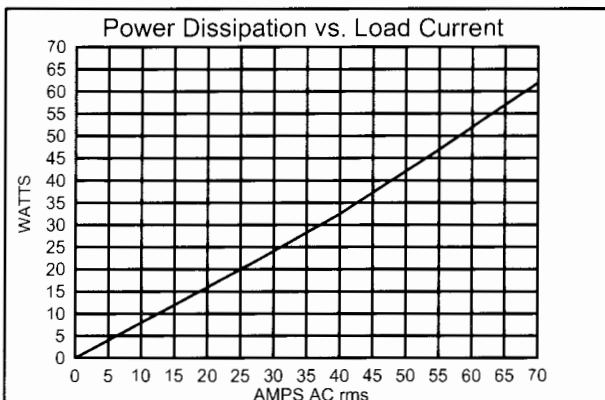

OPTIONAL 35 & 60-AMP CONTACTORS & TIMER MOUNTING PLATES



For 35, 60-amp or standard timer; with standard mounting bracket. The standard mounting bracket attaches to the panel with two 6-32 screws. Material: 3/8" thick phenolic.



For single pole, 35 and 60-amp units, and for timers. This is the standard bracket for hybrid timers. Material: 16-ga., zinc-plated steel.



Narrow two or three pole 35 or 60 amp units only



Two pole 35 or 60 amp narrow mounted, front facing, off set, for panel mounting.



Load terminals on top for shorter overall height.



Two pole 35 or 60 amp narrow mounted, front facing, off set, for snap track mounted



Din rail mount 35 mm symmetrical for 35 and 60 AMP units.

Contactors mounted in enclosures are available. Contact factory.




TS (Top Screws)
Designated by the letters "TS"
in the catalog number suffix.
For timers and 35-amp units.
(Dimensions same as T-Top).

NORMALLY OPEN

35-AMP UNITS ONLY

L-1 (Leaded)
Designated by the letters "L-1"
in the catalog number suffix.
For normally open 35-amp units.
Height 3-3/16" other dimensions
same as standard (page 6).



SNAP TRACK™ MOUNTING

Specify suffix "-B" for SNAP TRACK mount on single, two and three pole 35 and 60 amp series and single and two pole 30 amp series. SNAP TRACK mount is standard on three pole 30 amp without suffix.





"B" BRACKET

B BRACKET
For single pole 35 and 60-amp units, and for timers. Mounts into standard 3" snap-track. Material is 16-ga. plated steel

SNAP TRACK Mounting Channel™ Reed Devices Inc., a subsidiary of Augat, Inc.


PANEL, TERMINAL INFORMATION & DERATING CHARTS

MERCURY CONTACTORS

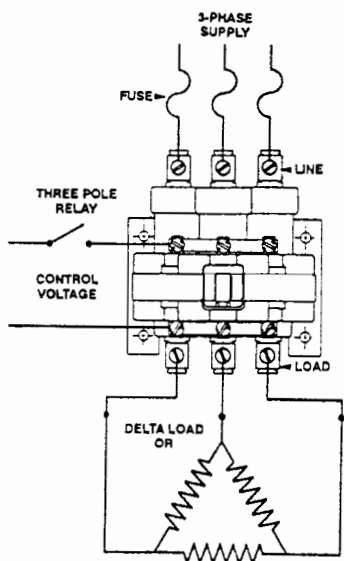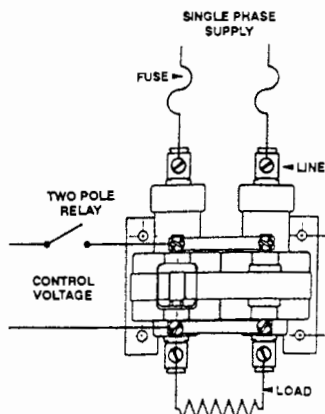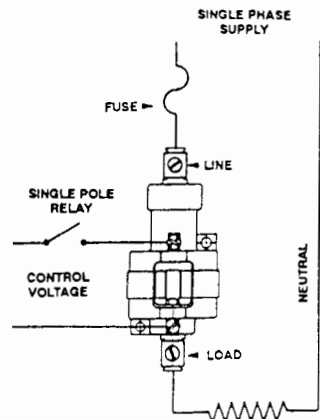


SOLID STATE


Single pole relay application Line-Neutral, Line-Line.



2 single pole relays in 3-phase applications Delta and Star connection (economy switch).

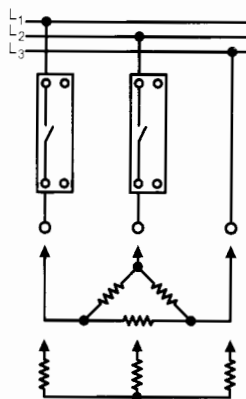

3 single pole relays in 3-phase applications Delta, Star and Star with neutral.

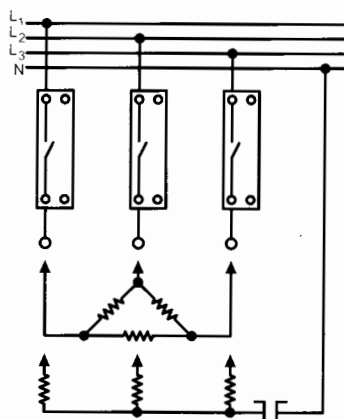

M.O.V.

Proper Fusing is Required

- While MDI Mercury contactors handle high inrush, such as lamps, mercury contactors are susceptible to damage by short circuit currents, and should be fused to minimize short circuit fault currents. UL class RK-1 and class J fuses and semiconductor I²t fuses more effectively protect relays. These are low current-peak fuses designed to limit short circuit currents. Regardless, when there is a short circuit, relay operations should be closely monitored afterward because of the possibility of concealed damage that could cause the relays to behave inconsistently.

RECOMMENDED

| 250VOLT | 600 VOLT |
|---------|----------|
| KTN-R | KTS-R |
| JJN/A3T | JJS |
| | JKS/A4J |
| | KTk-R |

- FOR SIZING OF RELAY SEE BELOW.
- FOR DATA ON STANDARD COILS SEE PAGES 5, 6, 11 and 3.
- MERCURY DISPLACEMENT RELAYS MUST MOUNT VERTICALLY $\pm 10^\circ$.
- CONTROL LINE CAN BE PROTECTED WITH METAL OXIDE VARISTORS (MOV), USE SUFFIX -11.
- DISCONNECT POWER BEFORE INSTALLING OR SERVICING. OBSERVE ALL ELECTRICAL AND SAFETY CODES AND ORDINANCES SUCH AS NATIONAL ELECTRIC CODE (NEC) AND THE OCCUPATIONAL SAFETY AND HEALTH ACT (OHS).

TORQUE SPECIFICATIONS


- FOR COILS 8 IN. LB MAX.
- FOR LINE AND LOAD TERMINALS SEE RATINGS LABELS.

SIZING RELAY

TO FIND AMPS PER POLE
3 Ø BALANCED HEATER LOADS

$$\text{AMPS PER POLE} = \frac{\text{KW} \times 1,000}{\text{VOLTS} \times 1.732}$$
 OR
 MULTIPLY THE KILOWATTS TIMES
THE APPROPRIATE FACTOR

| 3Ø AC | FACTORS |
|-----------|---------|
| 208 VOLTS | 2.776 |
| 220 VOLTS | 2.624 |
| 240 VOLTS | 2.406 |
| 277 VOLTS | 2.084 |
| 480 VOLTS | 1.203 |
| 600 VOLTS | 0.962 |



MOV CHART

| FOR | SIEMANS | HARRIS | C.K.E. | M.D.I. |
|-----------|---------|-----------|-----------|----------|
| 24 VOLTS | S14K30 | V47ZA7 | — | PM-567-5 |
| 120 VOLTS | S20K130 | V150LA20B | Z150LA20B | PM-567-1 |
| 220 VOLTS | S20K275 | V275LA40B | Z275LA40B | PM-567-2 |
| 277 VOLTS | S20K385 | V320LA40B | Z320LA40B | PM-567-3 |

Features and Options Available

Switches

Mechanical or Mercury
Normally Open/Pump Down
Normally Closed/Pump Up
Double Throw/Mechanical Only
Rated Up to 2 H.P.
Sensor or Control Floats

Float Material

HIPS 140°F 60°C
(High Impact Polystyrene)
ABS 186°F 85°C
(Acrylonitril Butadiene Styrene)
PC/ABS 221°F 105°C
(Polycarbonate ABS)

Construction

Outer Shell-Ultrasonically Welded
Cord is bonded with a Steel Ring
and Epoxy potted for a Seal.
Axially non-position sensitive.
Ball & Switch Housing is precision
molded for a consistent angle.


Cords

Flexible SJOW, in various lengths.
Molded Piggyback Plugs;
120 VAC NEMA 5-15 P&R
240 VAC NEMA 6-15 P&R, or Skived.
Cord Weights, or Weighted floats
for tetherless operations.
Cord tie wraps available.



A Series
Narrow Angle Operation
1 Amp @ 120 VAC
1 Amp @ 28 VDC


B Series
90 Deg. Operating Angle
1 Amp @ 120 VAC
1 Amp @ 28 VDC

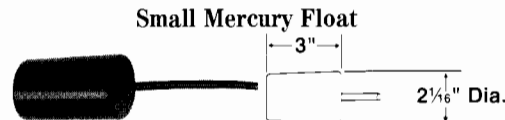

C SERIES
Narrow Angle Operation
13 Amp @ 120 VAC
6 Amp @ 240 VAC
with 16 GA. cord


D Series
30 Deg. Operating Angle
13 Amp @ 120 VAC
6 Amp @ 240 VAC
with 16 GA. cord

E Series
90 Deg. Operating Angle
13 Amp @ 120 VAC
6 Amp @ 240 VAC
with 16 GA. cord

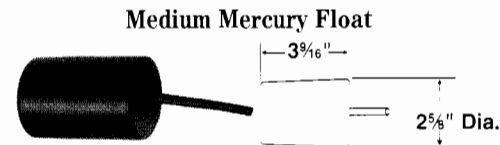

G Series
90 Deg. Operating Angle
1/2 H.P. @ 120/240 VAC
15 Amp @ 120/240 VAC with 14 GA. cord
13 Amp @ 120/240 VAC with 16 GA. cord
58.8 Amp overload

H Series
90 Deg. Operating Angle
1 H.P. @ 120 and 2 H.P. @ 240 VAC
15 Amp @ 120/240 VAC with 14 GA. cord
13 Amp @ 120/240 VAC with 16 GA. cord
96 Amp overload

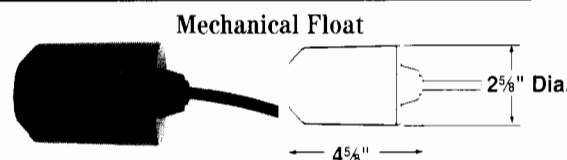

K Series
Tetherless with Internal Weight
Narrow Angle Operation
10 Amp @ 120/240 VAC
1/4 H.P. @ 120/240 VAC
34.8 Amp overload

N Series
Narrow Angle Operation
10 Amp @ 120/240 VAC
1/4 H.P. @ 120/240 VAC
34.8 Amp overload


P Series
Narrow Angle Operation
1/2 H.P. @ 120/240 VAC
15 Amp @ 120/240 VAC with 14 GA. cord
13 Amp @ 120/240 VAC
with 16 GA. cord
58.8 Amp overload

R Series
Tetherless with Internal Weight
Narrow Angle Operation
1/2 H.P. @ 120/240 VAC
15 Amp @ 120/240 VAC with 14 GA. cord
13 Amp @ 120/240 VAC
with 16 GA cord
58.8 Amp overload


For **ACTIVE** SWITCH & SENSOR Products & other MDI Level Control products contact factory.

Tether Data

For neoprene jacketed cord
(16-2 SJOW-A/SJOW)

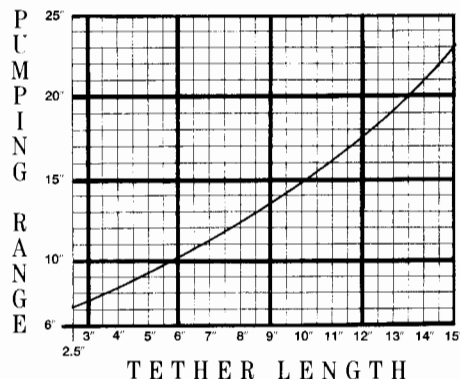


Typical Normally Open (Pump Down) Application

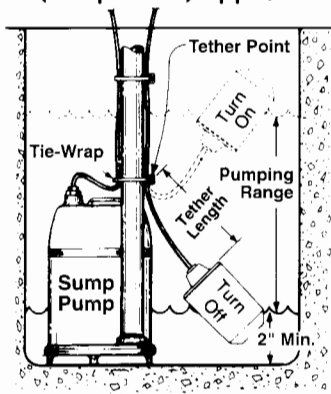

**Tether
Weights are
Available.
Contact
the Factory.**

Typical Normally Closed (Pump Up) Application



1. Attach cord, using a tie-wrap, to any convenient rigid surface as illustrated. This is known as the tether point. Do not tighten until both turn-on and turn-off levels are established.
2. To adjust for greater distance between turn-on and turn-off, increase cord length between tether point and float. For less distance between turn-on

and turn-off, decrease cord length.

3. Make sure the float is at least 2 inches above pump base, in the lower position, before tightening tie-wrap at the tether point.
4. Plug piggy-back switch cord (current tap) into grounded outlet, then plug pump into piggy-back switch cord, and check for proper operation.

How to order Liquid Level Control Floats

BASIC SWITCH SERIES

MERCURY

A-TS-1

B-WATS-1

C-TS-10

D-NATS-20

E-WATS-20

MECHANICALS

G-½ H.P. 90 DEG.

H-1 & 2 H.P. 90 DEG.

K-10 AMP NARROW ANGLE
TETHERLESS

N-10 AMP NARROW ANGLE

P-½ H.P. NARROW ANGLE

R-½ H.P. NARROW ANGLE
TETHERLESS

FLOAT SIZES & STANDARD COLOR CODE

| NORMALLY OPEN | NORMALLY CLOSED | SERIES of BASIC SWITCH |
|---|----------------------------------|--|
| S-SMALL MERCURY BLACK | S-SMALL MERCURY BLACK | A and B series |
| M-MEDIUM MERCURY BLACK | B-MEDIUM MERCURY YELLOW | C, D, and E series |
| F-MECHANICAL BLACK | YW-MECHANICAL YELLOW or WHITE | G, H, K, N, P, or R series |
| HIGH TEMPERATURE | HIGH TEMPERATURE | HIGH TEMPERATURE |
| R-MECHANICAL RED | B-MECHANICAL BLUE | G, H, K, N, P, or R series |
| G-GREEN for <u>DOUBLE THROW</u> Mechanical Switches | | DOUBLE THROW G, H, K, N, P, or R series |

TERMINATION & LABEL DESIGNATION

00-NO TERMINATION, STANDARD SKIVE (FIG. 4)

NO LABEL (COMPONENT RECOGNIZED)

C1-115 VAC SERIES PLUG (6' MIN. SEE FIG. 1)
LABEL ON CORD (LISTED)

F1-115 VAC SERIES PLUG (6' MIN. SEE FIG. 1)
LABEL ON FLOAT (LISTED)

R1-115 VAC SERIES PLUG (6' MIN. SEE FIG. 1)
NO LABEL (COMPONENT RECOGNIZED)

C2-230 VAC SERIES PLUG (6' MIN. SEE FIG. 2)
LABEL ON CORD (LISTED)

F2-230 VAC SERIES PLUG (6' MIN. SEE FIG. 2)
LABEL ON FLOAT (LISTED)

R2-230 VAC SERIES PLUG (6' MIN. SEE FIG. 2)
NO LABEL (COMPONENT RECOGNIZED)

03-3 PIN BARREL PLUG (FIG. 3)
NO LABEL (COMPONENT RECOGNIZED)

F0-LABEL ON FLOAT, NO TERMINATION,
STANDARD SKIVE. (COMPONENT
RECOGNIZED) (FIG. 4)

GF10W1000-W

FLOAT MATERIAL

1-HIGH IMPACT POLYSTYRENE (HIPS)

2-ACRYLONITRILE BUTADIENE STYRENE

Suitable for sewage & high temp.

(ABS) Magnum 358 HP from Dow Chemical.

www.dow.com

CONTACTS

O-NORMALLY OPEN

C-NORMALLY CLOSED

D-DOUBLE THROW

CORD TYPE and MATERIAL

Y-18 GAUGE-CPE JACKETED

W-16 GAUGE-CPE JACKETED

U-14 GAUGE-CPE JACKETED

T-16 GAUGE-TEFLON JACKETED

(For 105 Deg C, or 221 Deg F)

OPTIONAL

B-INDIVIDUALLY BOXED








W-EXTERNALLY WEIGHTED

BW-INDIVIDUALLY BOXED,
and EXTERNALLY WEIGHTED



CORD LENGTH

From 01 to 50 feet.

Lengths are in even
foot increments.

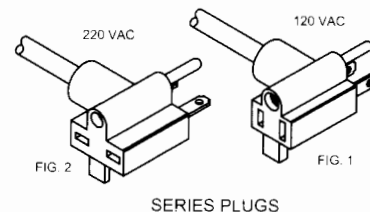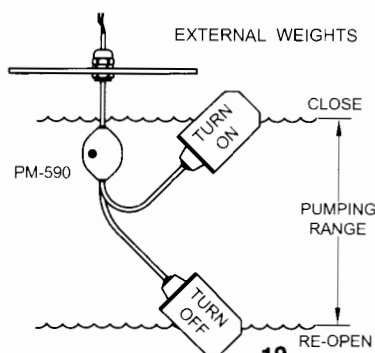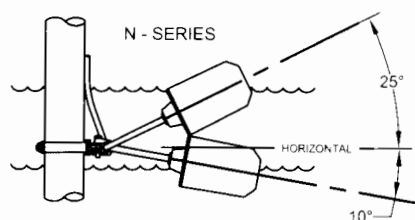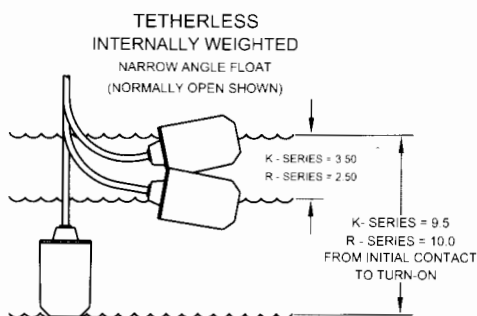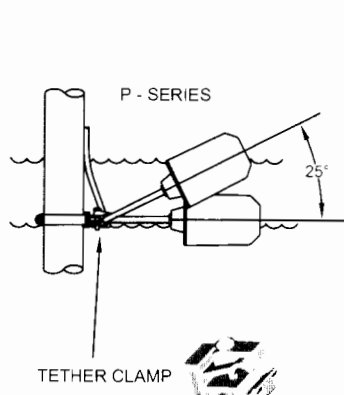

VERTICAL LIQUID LEVEL CONTROL SWITCH

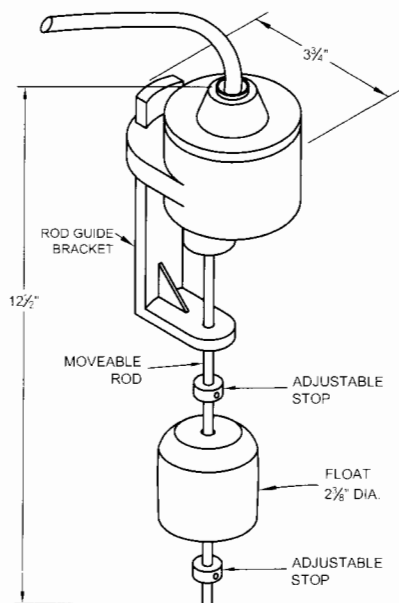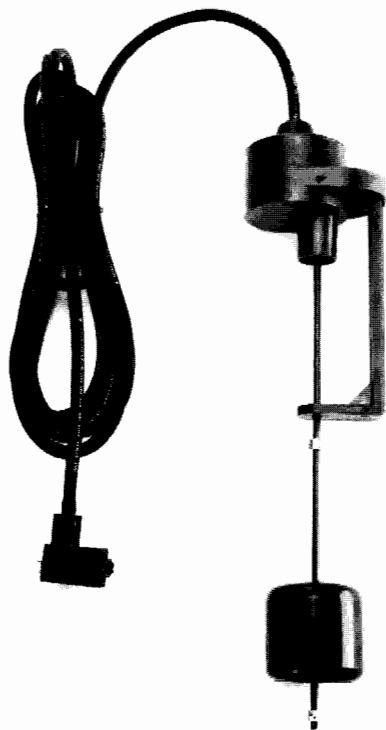

Numbering System

VS-012 03 R9L-01
A B C D

A- Length of cord in inches

B- Termination; Standards are:

00- 1 3/4" ROJ & 3/4" Skive

R1- Piggyback 120 VAC Recognized

C1- Piggyback 120 VAC Listed

R2- Piggyback 240 VAC Recognized

C2- Piggyback 240 VAC Listed

03- 3-Pin Barrel Plug Recognized

C3- 3-Pin Barrel Plug Listed

C- Rod & Guide Information

R9L- 9" Rod with Lower Guide

R8L- 8" Rod with Lower Guide

R7L- 7" Rod with Lower Guide

R9U- 9" Rod with Upper Guide



R8U- 8" Rod with Upper Guide

R7U- 7" Rod with Upper Guide

(optional)

D- With or Without Bracket, or Mounting System

01- Pipe Clamp

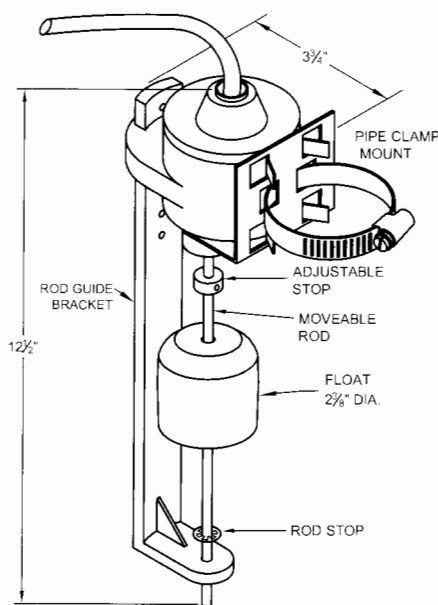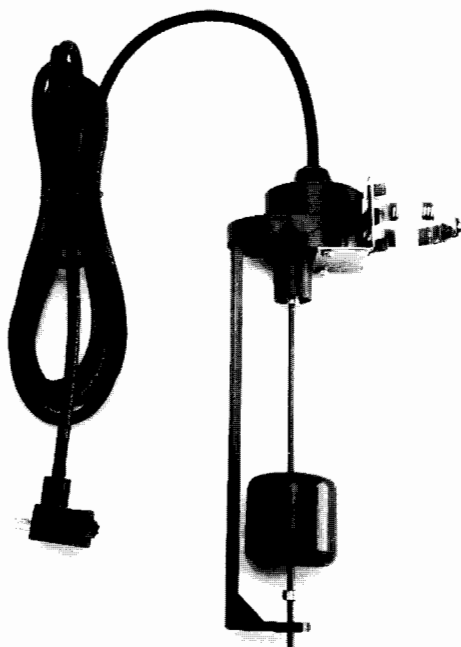

VS-Series

LIQUID LEVEL CONTROL

VS SERIES SUMP PUMP SWITCH

RATINGS: 10 AMP / 1/2 H.P @ 120/240 V
50/60 Hz. FOR USE IN LIQUID
UP TO 140° F / 60° C

PUMPING

RANGE: ADJUSTABLE UP TO 6 INCHES.

MATERIALS: *ENCLOSURE AND BRACKET
IS A.B.S. PLASTIC.

*FLOAT IS POLYPROPYLENE

*CORD IS C.P.E.



MOUNTING: *STANDARD MOUNTING
HOLES FOR #8 SCREWS ON
2.06 INCH CENTERS ARE
LOCATED UNDER HOUSING.

*OPTIONAL PIPE MOUNT
BRACKET ALLOWS FOR
MOUNTING TO STANDARD
SIZE SUMP DISCHARGE
PIPING.

TWIN FLOAT CONTROL

PRODUCT DESCRIPTION: The Twin Float pump switch consists of two floats, each float contains a mercury switch. One of the two floats contains a heavy-duty relay, which enables the floats to function in series. The relay eliminates pump chatter in turbulent conditions.

The unit is well suited for narrow & deep sump pump pits. On the N.O. (pump down) model, the pump is turned on when activated by the top float switch. The pump stays on until the bottom float switch turns it off. This allows a pumping range of about 48" with the standard 54" cord length on the bottom float. This can be extended almost indefinitely with longer cords.

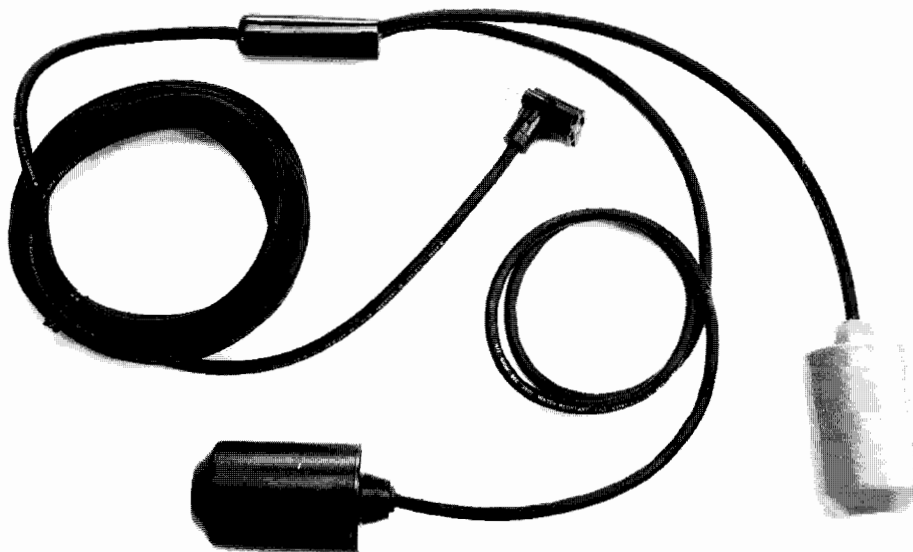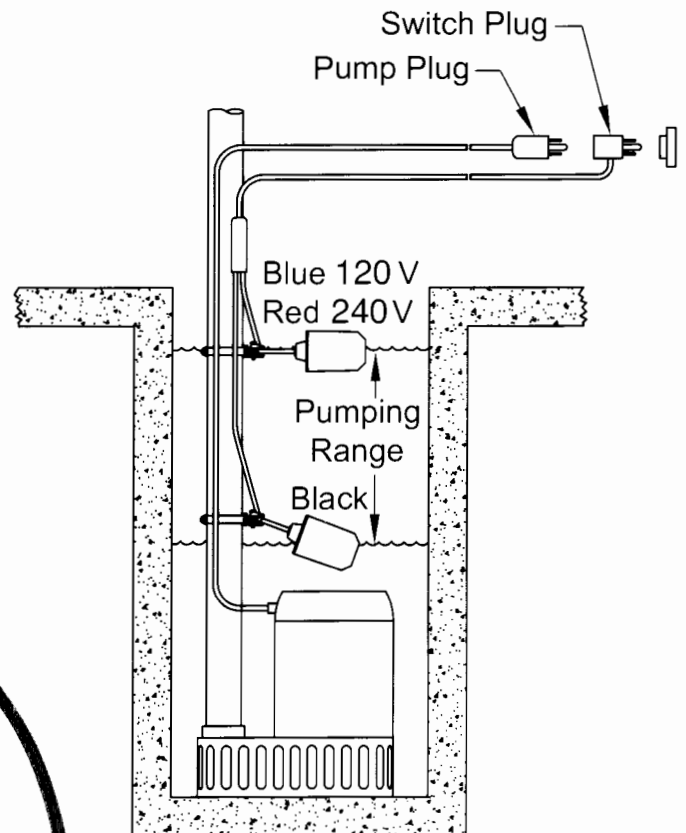

Numbering System

TFD 1 - 054 - W 15 01
A B C D E F

RATINGS:

With 16 AWG SJOW Cord (CPE)

13 AMP @ 120 VAC/240 VAC
3/4 H.P. or Less @ 120 VAC
1 H.P. or Less @ 240 VAC

With 14 AWG SJOW Cord (CPE)

15 AMP @ 120 VAC/240 VAC
1 H.P. or Less @ 120 VAC
2 H.P. or Less @ 240 VAC

Standard Colors:

Top float color indicates voltage
Blue float = 120 VAC
Red float = 240 VAC

Bottom float color indicates Action

Graphite = Pump Down (Normally Open)
Yellow = Pump Up (Normally Closed)

A- Action

D = Pump Down (normally open)
U = Pump Down (normally closed)

B- Voltage

1 = 120 VAC
2 = 240 VAC

C- Bottom Float Cord Length

6" increments, min. length 12"

D- Cord Types

W = 16 AWG CPE jacketed SJO cord
U = 14 AWG CPE jacketed SJO cord

E- Power Cord Length in Feet

F- Power Cord

00 Standard Skive
01 120 VAC, 15 AMP piggyback (B must = 1)
02 240 VAC, 15 AMP piggyback (B must = 2)



Damper Arm Tilt Switch

DATS-1-SPDT

DATS-1-SPST

Fig.

1

1

RATINGS:

1 Amp @ 120 VAC/1 Amp @ 28 VDC

1 Amp @ 120 VAC/1 Amp @ 28 VDC

Tilt Switches

TS-1

2

1 Amp @ 120 VAC/1 Amp @ 28 VDC

TS-1-3

3

1 Amp @ 120 VAC/1 Amp @ 28 VDC

TS-1-6

4

1 Amp @ 120 VAC/1 Amp @ 28 VDC

TS-1C-L*

5

1 Amp @ 120 VAC/1 Amp @ 28 VDC

TS-10

6

10 Amp @ 120 VAC

TS-10C-L*

7

10 Amp @ 120 VAC

TS-20

6

20 Amp @ 240 VAC

TS-20C-L*

7

20 Amp @ 240 VAC

Tip Over Switch

TOS-12-2

8

12 Amp @ 120 VAC

TOS-12C-8

9

12 Amp @ 120 VAC

TOS-12C-L*

10

12 Amp @ 120 VAC

Magnetic Switch (Proximity)

MS-20

11

13 Amp @ 120 VAC/6 Amp @ 240 VAC

Narrow Angle Tilt Switch

NATS-20

11

13 Amp @ 120 VAC/6 Amp @ 240 VAC

Wide Angle Tilt Switches

WATS-1

12

1 Amp @ 120 VAC/1 Amp @ 28 VDC

WATS-1-3

3

1 Amp @ 120 VAC/1 Amp @ 28 VDC

WATS-1-6

4

1 Amp @ 120 VAC/1 Amp @ 28 VDC

WATS-1C-L*

5

1 Amp @ 120 VAC/1 Amp @ 28 VDC


WATS-20

11

13 Amp @ 120 VAC/6 Amp @ 240 VAC

For UL and CSA information, contact factory.

How to order Specify as shown below

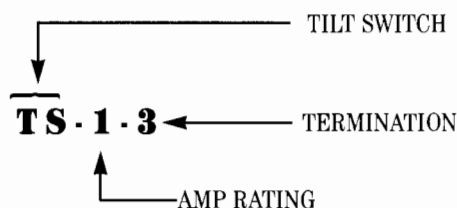

MOUNTING CLIPS

| PART NO. | FOR |
|-----------|----------------------|
| PM-348-36 | TS-1, TS-1-L1 |
| PM-348-44 | TS-10, TS-10-L1 |
| PM-348-50 | TS-1C-L1 |
| PM-348-62 | TS-10C-L1, TS-20C-L1 |

"C" FOR
CASED UNIT
THIS SPACE IS
BLANK FOR
UNINSULATED
UNITS.

TS-1C-L1

TERMINATION

ALL LEADED AND CASED TILT SWITCHES COME WITH SILICONE RUBBER MERCURY SWITCH LEAD WIRE, EXCEPT TOS-12

*TERMINATION WIRE LENGTHS






-L1= 6" Leads

-L2=12" Leads

-L3=18" Leads

-L4=24" Leads

FOR LEAD WIRE OR LENGTHS OTHER THAN THE ABOVE CONTACT THE FACTORY

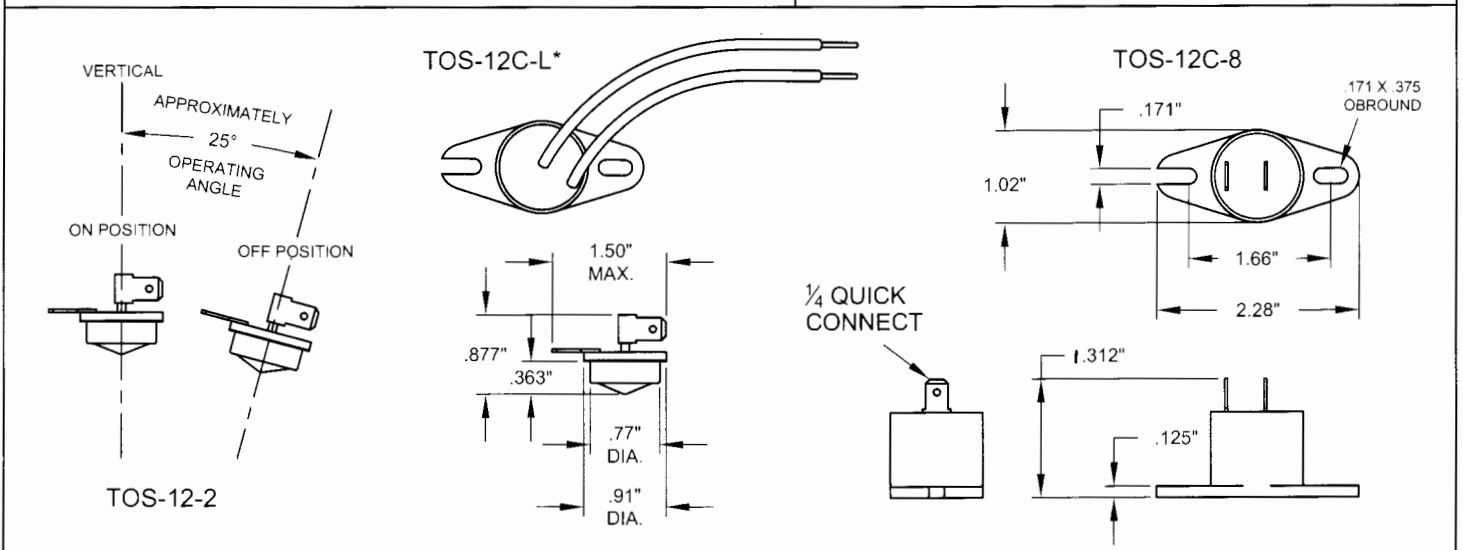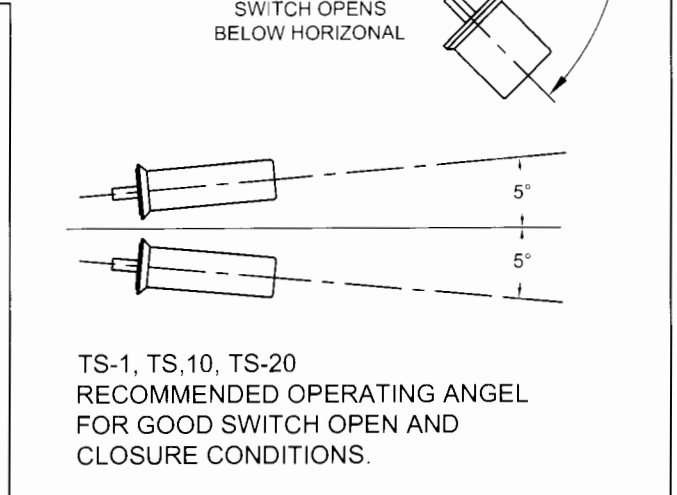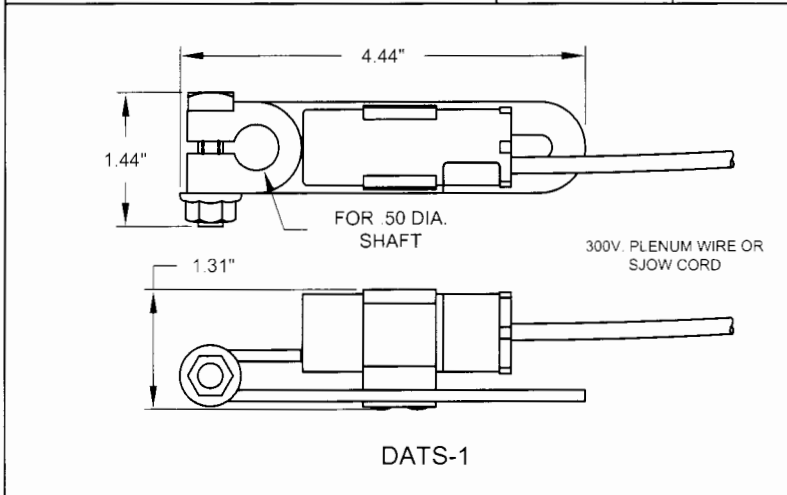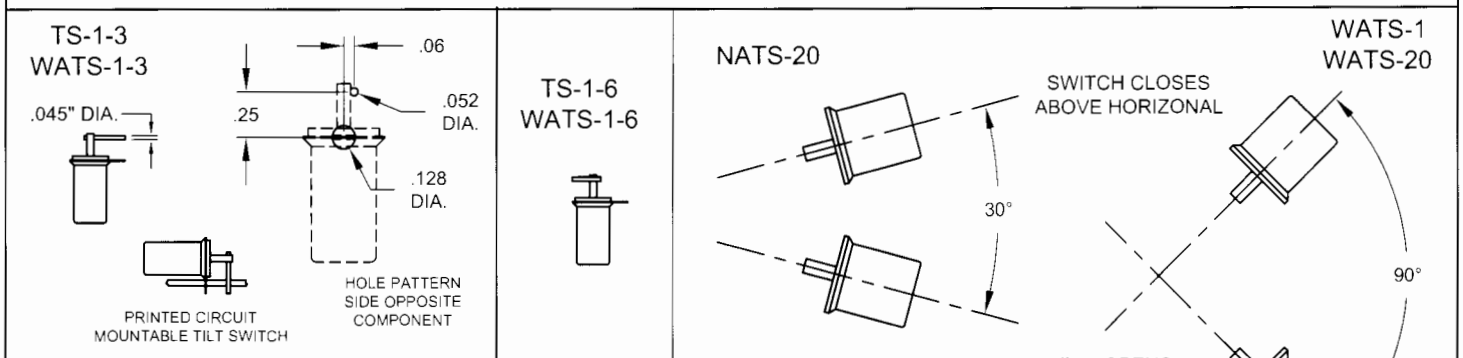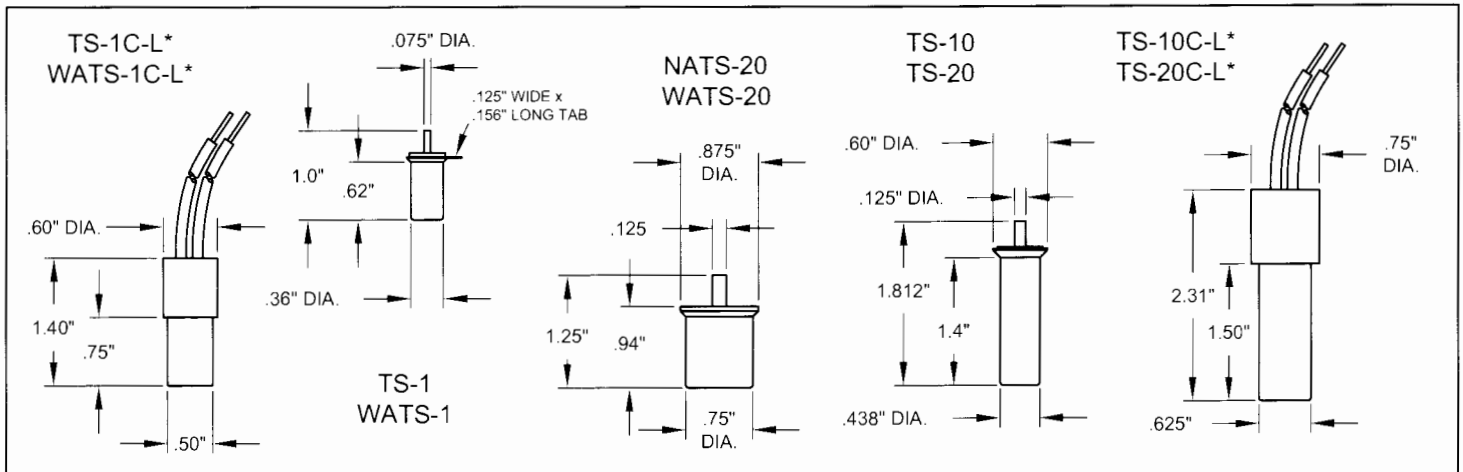

TYPICAL APPLICATIONS

FOR MDI'S DISPLACEMENT CONTACTORS

LIGHTING

Auditorium Lighting
Beacons and Search Lights
Copy Equipment
Dimmer Controls
Display Signs
Emergency Lighting
Flood Lights
High Intensity Lamps
Hospital Lighting
Lighting Test Panels
Mercury Vapor Lamps
Parking Lots
Photography Lighting
Scoreboards
Sodium Vapor Lamps
Stage Lighting
Street Lighting
Surgical Lighting Control
Tower Lights
Traffic Signal
Tungsten lamps

GENERAL APPLICATIONS

Air Conditioning
Alarm Systems
Automatic Door Closers
Battery Chargers
Blue Print Machines
Copiers
Computer Power Supplies

Corrosive Locations
Dusty, Oil Locations
Dry Cleaning Equipment
Energy Management Systems
Farm Incubators and Brooders
Low Voltage Switching
Marking and Engraving Equipment
Motor Starting
Soldering Systems
Surgical Equipment
Telephone Switching
Test Panels
Vapor Degreasers
X-Ray Machine Controls

ELECTRIC HEATERS

Baseboard Heaters
Blow Molding
Cabinet Heaters
Chemical Tank Heaters
Curing Furnaces
Drying Ovens
Duct Heaters
Film Packaging
Glass Furnaces
Heat Lamps
Heat Sealing Machines
Induction Heater
Industrial Ovens
Infrared Heaters
Ink Drying

Ink Heating
Injection Molding Machines
Kilns
Lab Ovens
Packaging Equipment
Plastic Extruders
Pool Heaters
Quartz Heaters
Radiant Heaters
Roof Top Heating
Shrink Tunnels
Unit Heaters
Vacuum Forming

FOOD INDUSTRY EQUIPMENT

(Heaters)
Baking Ovens
Coffee Urns
Deep Fryers
Dishwashers
Electric Grills
Electric Ranges
Pizza Ovens
Steam Generators

SPECIALTY APPLICATIONS

Capacitor Discharge Systems
Hazardous Locations
Mining Equipment
Phase Converters

WARRANTY

Mercury Displacement Industries, Inc., warrants its products to be free from defects in material or workmanship for one year, and will replace any units with such defects. Warranty is void if units are improperly applied. Mercury Displacement Industries, Inc. shall not be liable for special or consequential damages.

For ACTIVE SWITCH PRODUCTS

Contact MDI Inc.

1-800-634-4077 or www.mdious.com

TO RECYCLE USED CONTACTORS, TILT
SWITCHES & MERCURY FLOATS, RETURN TO MDI

MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 • U.S. 12 East • Edwardsburg, Michigan 49112-0710

PHONE (269) 663-8574 • FAX (269) 663-2924

1-800-MDI-4077 • 1-800-634-4077

www.mdious.com