


### FEATURES


- **Compact (half-size).**

The base area is approximately half the size of conventional (JS-M) relays. The controller unit can be made more compact.

Base area has been reduced by one half



mm inch



- **Perfect for automobile electrical systems.**

Over  $2 \times 10^5$  openings possible with a 14 V DC motor load, an inrush current of 25 A, and steady state current of 5 A. (N.O. side)

- **Standard terminal pitch employed**

The terminal array used is identical to that used in small automotive relays.

- **Plastic sealed type.**

Plastically sealed for automatic cleaning.

- **Line-up of 1 Form A and 1 Form C.**

### TYPICAL APPLICATIONS

- Power windows
- Auto door lock
- Electrically powered sun roof
- Electrically powered mirror
- Cornerring lamp, etc.

**RoHS Directive compatibility information**  
<http://www.nais-e.com/>

### SPECIFICATIONS

#### Contact

Arrangement	1 Form A		1 Form C	
Contact material	AgSnO <sub>2</sub> type			
Initial contact resistance (By voltage drop 6V DC 1A)	Max. 100 mΩ			
Rating (resistive load)	Nominal switching capacity	20 A 14 V DC	20 A 14 V DC (N.O.) 10 A 14 V DC (N.C.)	
	Min. switching capacity*1	1 A 12 V DC		
	Max. carrying current	35 A (12V, at 20°C 68°F for 2 minutes) 25 A (12V, at 20°C 68°F for 1 hour) 30 A (12V, at 85°C 185°F for 2 minutes) 20 A (12V, at 85°C 185°F for 1 hour)		
Expected life (min. operations)	Mechanical (at 120cpm)	10 <sup>7</sup>		
	Electrical (at rated load)	Resistive	10 <sup>5</sup> *1	10 <sup>5</sup> (N.O.)*2 10 <sup>5</sup> (N.C.)*3
		Motor load	2×10 <sup>5</sup> *4 5×10 <sup>4</sup> *5	2×10 <sup>5</sup> (N.O.)*6 5×10 <sup>4</sup> (N.O.)*7 2×10 <sup>5</sup> (N.C.)*8

#### Coil

Nominal operating power	640 mW
-------------------------	--------

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

#### Remarks

- \*1 at 20 A 14 V DC, at 20 cpm, operating frequency: 1s ON, 9s OFF
- \*2 at 20 A 14 V DC, operating frequency: 1s ON, 9s OFF
- \*3 at 10 A 14 V DC, at 20 cpm, operating frequency: 1s ON, 9s OFF
- \*4 at 5 A (steady), 25 A (inrush) 14 V DC
- \*5 at 20 A 14 V DC (Motor lock), operating frequency: 0.5 s ON, 9.5 s OFF
- \*6 at 5A (steady), 25 A (inrush) 14 V DC

#### Characteristics

Max. operating speed (at rated load)	6 cpm	
Initial insulation resistance*9	Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage*10	Between open contacts	500 Vrms for 1min.
	Between contact and coil	500 Vrms for 1min.
Operate time*11 (at nominal voltage)	Max. 10 ms (at 20°C 68°F)	
Release time (without diode)*11 (at nominal voltage) (Initial)	Max. 10 ms (at 20°C 68°F)	
Shock resistance	Functional*12	Min. 100 m/s <sup>2</sup> {10 G}
	Destructive*13	Min. 1,000 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*14	10 Hz to 100 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
	Destructive*15	10 Hz to 500 Hz, Min. 44.1 m/s <sup>2</sup> {4.5 G}
Conditions in case of operation, transport and storage*16 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +85°C -40°F to +185°F
	Humidity	5% R.H. to 85% R.H.
Mass	Approx. 5 g .176 oz	

- \*7 at 20 A 14 V DC (Motor lock)
- \*8 at peak 20 A 14 V DC (Braking current) operating frequency: 0.5 s ON, 9.5 s OFF
- \*9 Measurement at same location as "Initial break down voltage" section.
- \*10 Detection current: 10mA
- \*11 Excluding contact bounce time.
- \*12 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs
- \*13 Half-wave pulse of sine wave: 6 ms
- \*14 Detection time: 10 μs
- \*15 Time of vibration for each direction; X, Y, Z direction: 2 hours



\*16 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

# JJ-M

## ORDERING INFORMATION

Ex. JJM

1a

-

12 V

Contact arrangement	Coil voltage(DC)
1a: 1 Form A 1: 1 Form C	12 V

(Note) Standard packing: Carton: 50 pcs.; Case: 1,000 pcs.


## TYPES AND COIL DATA (at 20°C 68°F)

Contact arrangement	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (Initial)	Drop-out voltage, V DC (Initial)	Coil resistance $\Omega$	Nominal operating current mA	Nominal operating power mW	Usable voltage range, V DC
1 Form A	JJM1a-12 V	12	Max. 7.2	Min. 1.0	225 $\pm$ 10%	53.3 $\pm$ 10%	640	10 to 16
1 Form C	JJM1-12 V	12	Max. 7.2	Min. 1.0	225 $\pm$ 10%	53.3 $\pm$ 10%	640	10 to 16

\* Other pick-up voltage types are also available. Please contact us for details.

## DIMENSIONS

mm inch

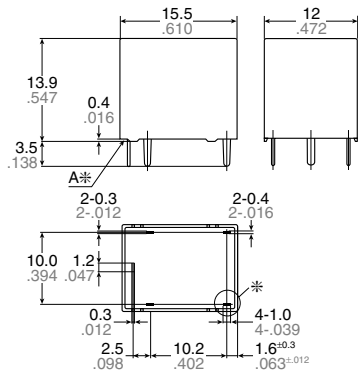


Note: \*Marked terminal is only for 1Form C type


\* Dimensions (thickness and width) of terminal specified in this catalog is measured before pre-soldering.  
Intervals between terminals is measured at A surface level.

Schematic (Bottom view)

1a




1c




PC board pattern (Bottom view)

1a



1c



Tolerance:  $\pm 0.1 \pm 0.004$

### Dimension:

Max. 1mm .039 inch:

1 to 3mm .039 to .118 inch:  $\pm 0.2 \pm 0.008$

Min. 3mm .118 inch:  $\pm 0.3 \pm 0.012$

### General tolerance

$\pm 0.1 \pm 0.004$

## REFERENCE DATA

### 1. Coil temperature rise


Sample: JJM1-12V, 6pcs

Point measured: Inside the coil


Contact current: Now current through

contact, 5A, 10A, 15A, 20A


Resistance method, ambient temperature 85°C 185°F

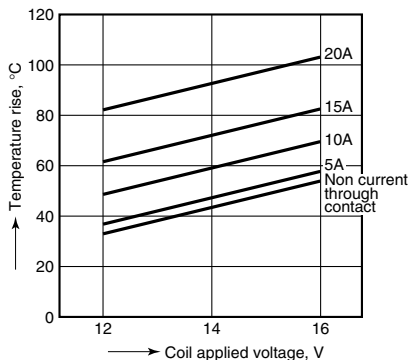

### 2. Max. switching capability (Resistive load)

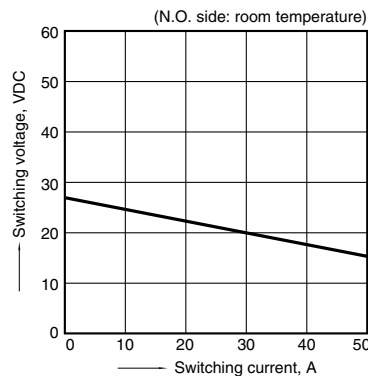


### 3. Ambient temperature and operating voltage range

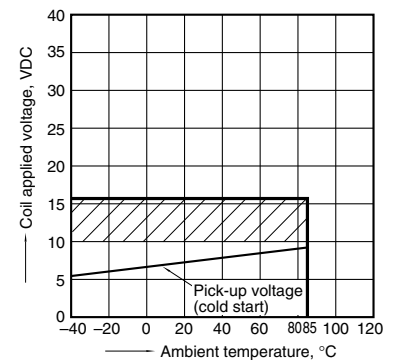


4. Distribution of pick-up and drop-out voltage

Sample: JJM1-12V, 100pcs

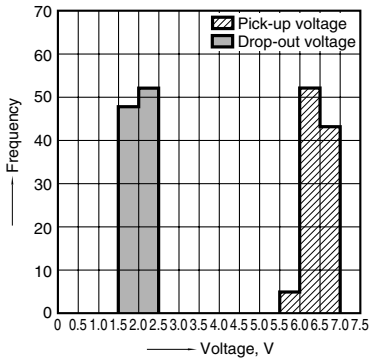

5. Distribution of operate time


Sample: JJM1-12V, 100pcs

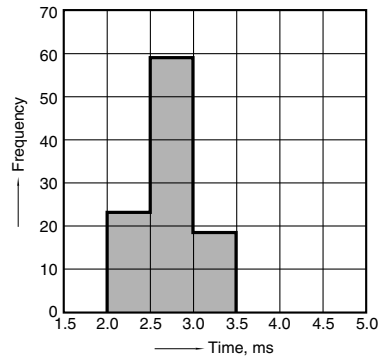

6. Distribution of release time

Sample: JJM1-12V, 100pcs

\* With diode

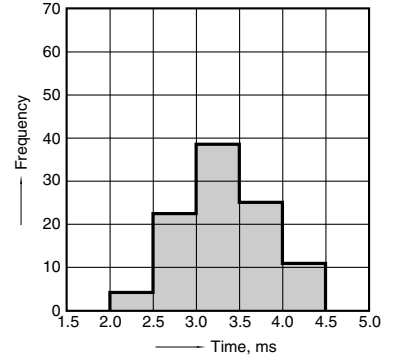


7-(1). Electrical life test (at rated load)

Sample: JJM1-12V

Quantity: n = 6 (NC = 3, NO = 3)

Load: Resistive load (NC side: 10A 14V DC, NO side: 20 A 14 V DC); Operating frequency: ON 1s, OFF 9s

Ambient temperature: Room temperature

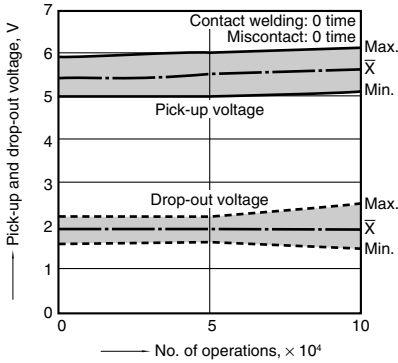

7-(2). Electrical life test (Motor free)

Sample: JJM1-12V, 6pcs.


Load: 5A, Inrush 25A, Brake current 18A 14V DC,

Power window motor load (Free condition).


Operating frequency: (ON : OFF = 0.5s : 9.5s)

Ambient temperature: Room temperature


Circuit :

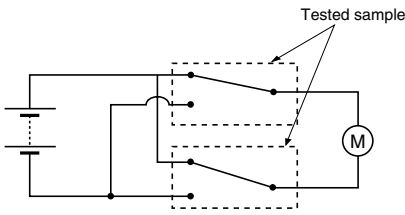

Change of pick-up and drop-out voltage

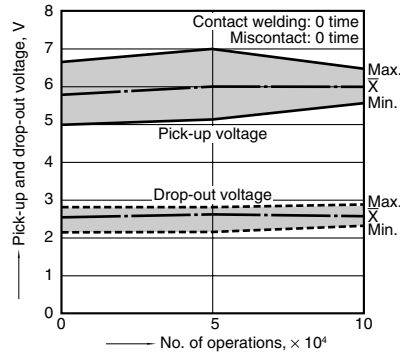

Change of contact resistance

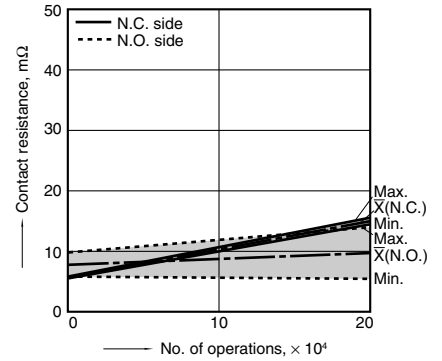

7-(3). Electrical life test (Motor lock)

Sample: JJM1-12V, 6pcs.


Load: 20A, 14VDC,

Power window motor actual load (lock condition).


Operating frequency: (ON : OFF = 1s : 5s)

Ambient temperature: Room temperature


Circuit :

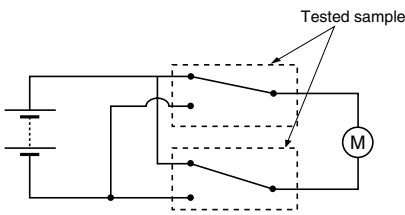

Change of pick-up and drop-out voltage

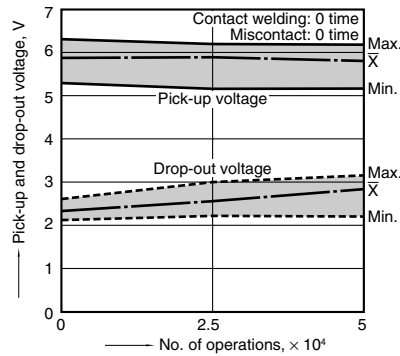

Change of contact resistance

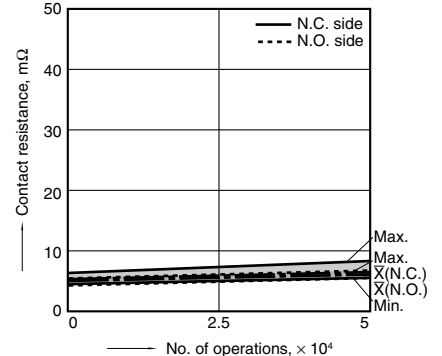

# JJ-M

## 7-(4). Electrical life test (Lamp load)


Sample: JJM1-12V, 6pcs.

Load: 27W+21W, min. 4A (steady), Lamp actual load


Operating frequency: ON 2s, OFF 13s

Ambient temperature: Room temperature


Circuit :




Inrush current: 42A, Steady current: 4.4A

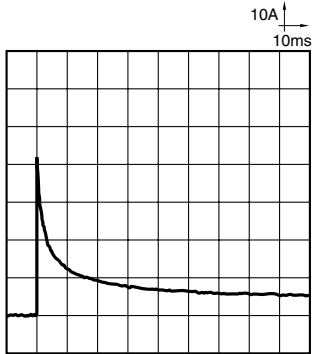

## Change of pick-up and drop-out voltage

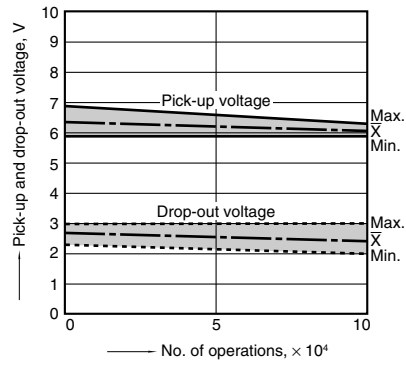

## Change of contact resistance

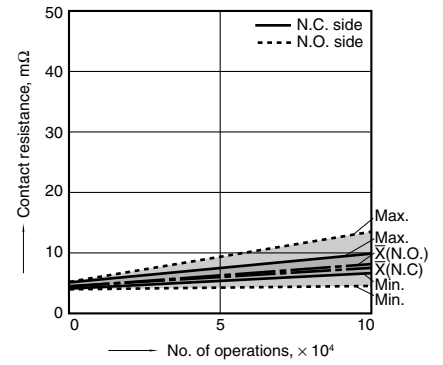

**For Cautions for Use, see Relay Technical Information .**