


Item no.: 231-640
 Product description: MALE CONNECTOR; 10 POLE; PIN SPACING 5.08 MM / 0.2 IN; CAGE CLAMP® CONNECTION



Packing unit 25 pieces

Product group	3 (Multi Conn. System)
Pin spacing from	5.08 mm
Pin spacing from	0.2 in
pole count	10
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	15.42 g
Color	orange
No. of connection Points	10
No. of potentials	10
Height	14.3 mm
Height	0.563 in
Width	53.4 mm
Width	2.102 in
Depth	27.5 mm

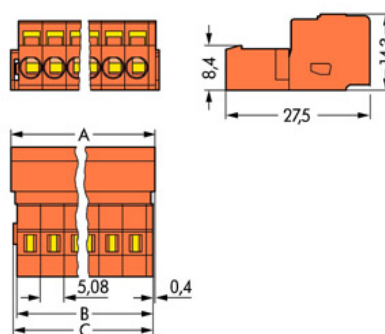

Depth	1.083 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
231-640	ABS	04-HG469925-PDA	400	12	0,8-2,5
231-640	BV	11915/A0	400	16	2,5
231-640	CCA	5764	250	12	0,08-2,5
231-640	CSA	154112-1466354	300	15	22-12
231-640	DEMKO	88126	250		2,5
231-640	GL	17296-00HH	400	12	0,8-2,5
231-640	KEMA	2083746.02	250	12	0,08-2,5
231-640	KR	HMB05880-EL003	250/400	12/16	2,5
231-640	LR	96/20035	400	12	0,8-2,5
231-640	NEMKO	P94101840	250		2,5
231-640	RMR	11130002	400	12	0,8-2,5
231-640	UR	E45171	600	15	12
231-640	UR	E45172	300	15	22-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected