


Item no.: 261-160
 Product description: 2-CONDUCTOR TERMINAL STRIP LATERAL MARKING 10 POLE WITH SNAP-IN MOUNTING FOOT FOR ALUMINUM RAIL 210-154 OR WITH MOUNTING ADAPTER 209-120 FOR TS 35 SIDE-ENTRY



Packing unit 25 pieces

Product group	9 (Std Chassis Mt Blocks)
pole count	10
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	24 A
Weight	25.38 g
Color	gray
Wiring type	Side-entry
No. of connection Points	20
No. of potentials	10
Height	18 mm
Height	0.709 in
Width	64.4 mm
Width	2.535 in
Depth	28 mm
Depth	1.103 in

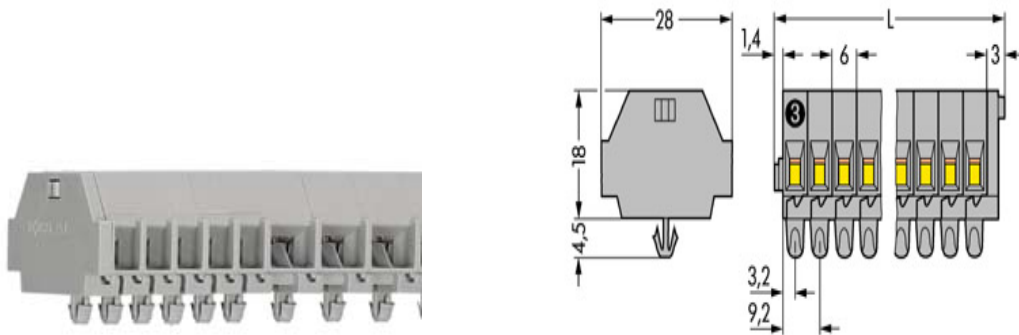

Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
261-160	ABS	04-HG476174-PDA	500	26	2,5
261-160	BV	07436/C0	500	24	0,08-2,5
261-160	CCA	NL5801	500		0,08-2,5
261-160	CSA	18677-45	300/600	20/5	26-14
261-160	DNV	E7569	500	24	2,5
261-160	GL	17295-00HH	500	24	2,5
261-160	KEMA	2079569.02	500		0,08-2,5
261-160	KR	HMB05880-EL002	500	24	2,5
261-160	LR	92/20242(E5)	400	24	2,5
261-160	PRS	TE/1718/880590/08	500		0,08-2,5
261-160	RMR	11130002	500	26	2,5
261-160	UR	E45172	300/600	15/5	28-14

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected