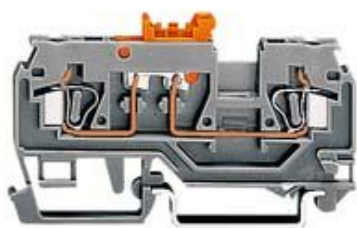

Item no.: 280-876

Product description: 2-CONDUCTOR DISCONNECT TERMINAL BLOCK FOR TEST AND MEASUREMENT WITH KNIFE DISCONNECT DISCONNECT LINK ORANGE WITH TEST SLOT FOR TEST PLUG Ø 2 MM/0.079 IN AND Ø 2.3 / 0.091 IN SUITABLE FOR EX I APPLICATIONS



Produkt kann von Bild abweichen / product may differ

Packing unit 100 pieces

RoHS compliant

Product group	1 (Rail Mounted Terminal Blocks)
Cross section [mm ²]	0.08 - 2.5 mm ²
Cross section [AWG]	28 - 12 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Weight	8.607 g
Color	blue
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	28.5 mm
Height	1.12 in
Width	5 mm

Width	0.197 in
Depth	69.5 mm
Depth	2.738 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in
Mounting	TS 35



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
280-876	ABS	05-HG476175/3-PDA	250	16	2,5
280-876	BV	07436/Co	250	16	2,5
280-876	CCA	NL5855	250	16	2,5
280-876	CSA	154112-1536071	300	15	28-12
280-876	DNV	E-10423	800	20	2,5
280-876	GL	17295-00HH	400	16	2,5
280-876	KEMA	2082859.07	250	16	2,5
280-876	LR	91/20112(E6)	250	16	2,5
280-876	PRS	TE/1718/880590/08	250	16	2,5
280-876	RMR	11130002	250	16	2,5
280-876	UR	E45172	600	15	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected