


---

Item no.: 282-697  
Product description: 2-CONDUCTOR DISCONNECT TERMINAL BLOCK; CENTER MARKING; WITH TESTING FACILITY; DISCONNECT LINK ORANGE; FRONT-ENTRY; CAGE CLAMP® CONNECTION

---

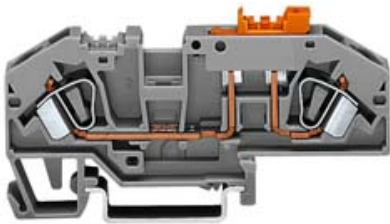

Packing unit 25 pieces

Product group	1 (Rail Mounted Terminal Blocks)
Cross section from [mm <sup>2</sup> ]	0.2 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	6 mm <sup>2</sup>
Cross section from [AWG]	24 AWG
Cross section to [AWG]	10 AWG
Connection method	CAGE CLAMP® CONNECTION
Voltage UL	600 V
Voltage CSA	300 V
Current rating UL	30 A
Current rating CSA	36 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	30 A
Weight	18.599 g
Color	gray
Wiring type	Angled Type
No. of connection Points	2
No. of potentials	2
Height	37 mm
Height	1.46 in
Width	8 mm



Depth	85 mm
Depth	3.35 in
Strip length from	12 mm
Strip length to	13 mm
Strip length	0.49 in



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
282-697	ABS	05-HG476175/1-PDA	400	30	6,0
282-697	BV	07436/Co	400	30	6,0
282-697	CCA	NL5448	400	30	6
282-697	CSA	154112-1505033	300	36	24-10
282-697	Dep.MaE	CS4867N	600	40	6
282-697	DNV	E7570	400	30	6,0
282-697	GL	17295-00HH	400	30	6,0
282-697	KEMA	2036066.01	400	30	6,0
282-697	KR	HMB05880-EL001	500/800	10/46	6
282-697	LR	91/20112(E3)	400	30	6,0
282-697	RMR	11130002	400	30	6,0
282-697	RosTesT	B09523	400	30	6,0
282-697	UL	E45172	600	30	24-10

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected