

Printview: Male header (for PCBs); Straight solder pin 0.8 x 0.8 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; Vertical PCB mounting; with closed end - Item No.: 714-134



**Male header (for PCBs); Straight solder pin 0.8 x 0.8 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; Vertical PCB mounting; with closed end**

Item No.: 714-134



Male header (for PCBs); Straight solder pin 0.8 x 0.8 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; Vertical PCB mounting; with closed end

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	714-134
GTIN / EAN	4045454858841
Content	1
Order amount	200
Customer item number	

## Notes

*Item description: Header housing is molded of THR-compatible insulation material for lead-free Reflow soldering Separated pin slots prevent damage and make the headers touch-proof when unplugged Coding option available*

## Technical data

### Miscellaneous

No. of poles	4
Pin spacing	3.5 mm (0.138 in)


Printview: Male header (for PCBs); Straight solder pin 0.8 x 0.8 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in;  
 Vertical PCB mounting; with closed end - Item No.: 714-134

<b>Technical data</b>	
Total number of potentials	4
Color	black
Ratings per	IEC/EN 60664-1
Rated voltage (III / 3) [V]	160 [V]
Rated impulse voltage (III / 3) [kV]	2.5 [kV]
Rated voltage (III/2) [V]	160 [V]
Rated impulse voltage (III / 2) [kV]	2.5 [kV]
Rated voltage (II / 2) [V]	320 [V]
Rated impulse voltage (II / 2) [kV]	2.5 [kV]
Rated current [A]	8 [A]
Legend for ratings	(III / 2) Overvoltage category III /
Number of levels	1
Solder pin length [mm]	3.4 [mm]
Drilled hole diameter (tolerance) [mm]	1.2(+ 0.1) [mm]
Material group	I
Insulating material	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Limit temperature range	-60 ... 100 C
Contact material	Electrolytic copper (Ecu)
Contact plating	tin-plated
Fire load [MJ]	0.018 [MJ]
Weight [g]	0.9 [g]
Width	15.4 mm / 0.606 Inch
Height	13.1 mm / 0.516 Inch
Height from the surface	9.7 mm / 0.382 Inch
Depth	6.9 mm / 0.272 Inch


Printview: Male header (for PCBs); Straight solder pin 0.8 x 0.8 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in;  
Vertical PCB mounting; with closed end - Item No.: 714-134

---

### Images & drawings

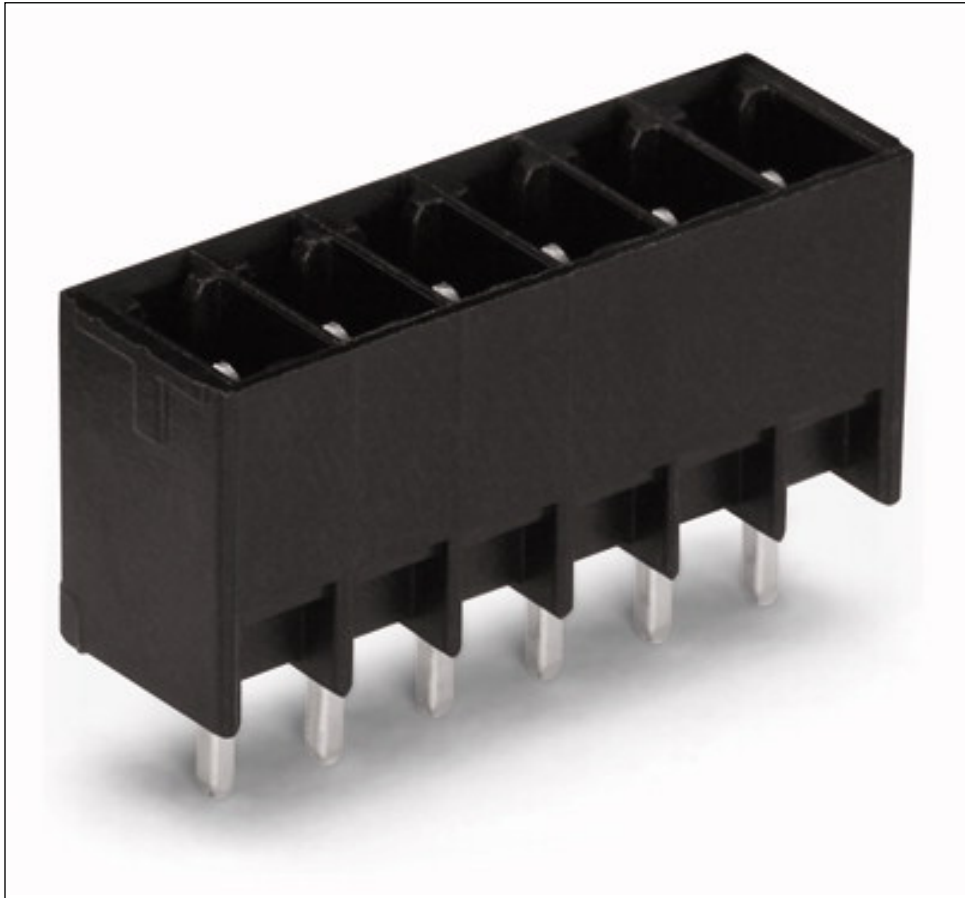

Printview: Male header (for PCBs); Straight solder pin 0.8 x 0.8 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in;  
Vertical PCB mounting; with closed end - Item No.: 714-134

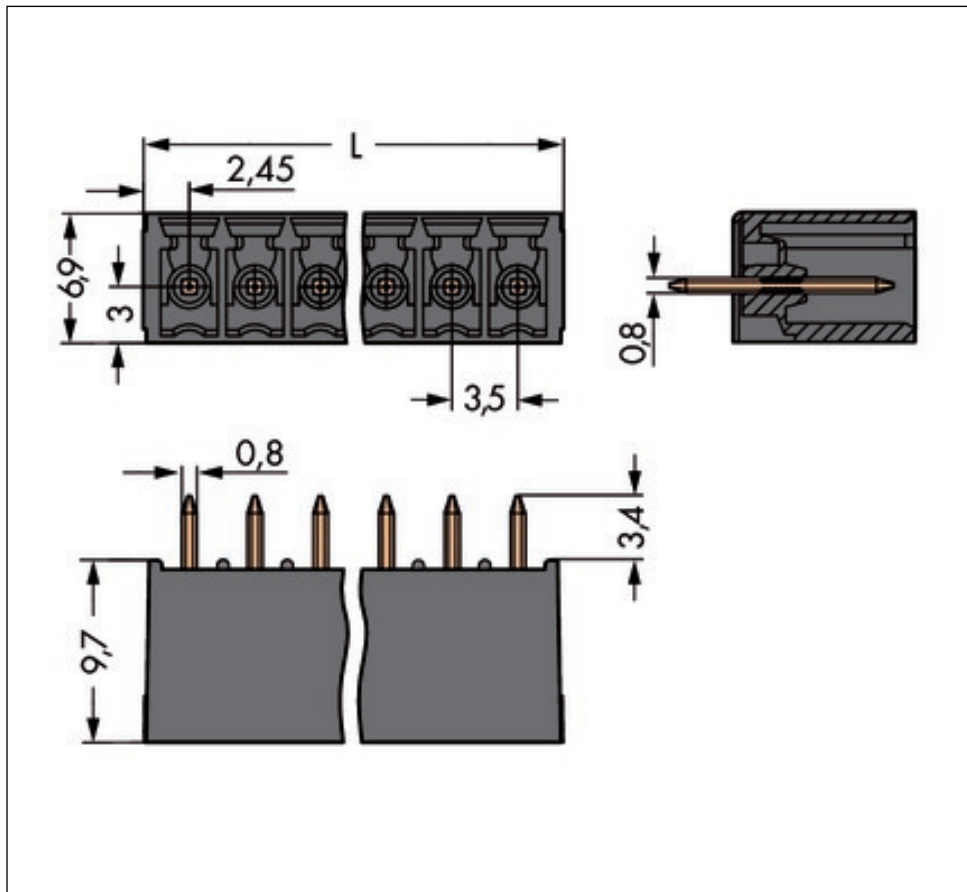

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.