


Item no.: 733-202  
 Product description: MALE CONNECTOR 2 POLE PIN SPACING 2.5 MM / 0.098 IN  
 100% PROTECTED AGAINST MISMATING

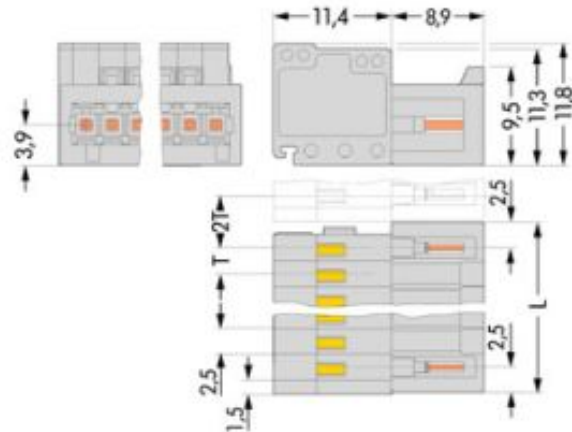

Packing unit 200 pieces

Product group	3 (Multi Conn. System)
Pin spacing from	2.5 mm
Pin spacing from	0.098 in
pole count	2
Cross section [mm <sup>2</sup> ]	0.08 - 0.5 mm <sup>2</sup>
Cross section [AWG]	28 - 20 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	4 A
Weight	1.2 g
Color	light gray
No. of connection Points	2
No. of potentials	2
Height	11.8 mm
Height	0.465 in
Width	7.5 mm
Width	0.295 in
Depth	20.3 mm
Depth	0.799 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

xxx-xxx/032-000

Strain relief plate 6 mm



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
733-202	ABS	04-HG469925/1-PDA	250	4	0,8-0,5
733-202	BV	11915/A0	250	4	0,8-0,5
733-202	CCA	NL5640	250	4	0,8-0,5
733-202	CSA	154112-1465035	150	4	28-20
733-202	DNV	E-9218	250	4	0,8-0,5
733-202	GL	17296-00HH	250	4	0,8-0,5
733-202	KEMA	2077592.01	250	4	0,8-0,5
733-202	LR	96/20035	250	6	0,8-0,5
733-202	RMR	11130002	250	4	0,8-0,5
733-202	UR	E45171	250	4	12
733-202	UR	E45172	150	4	28-20

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected