

Printview: Male header (for PCBs); Press-in pin 0.6 x 0.6 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; 100% protected against mismatching; with closed end; Press-in technology; Vertical PCB mounting - Item No.: 734-134/100-000



Male header (for PCBs); Press-in pin 0.6 x 0.6 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; 100% protected against mismatching; with closed end; Press-in technology; Vertical PCB mounting

Item No.: 734-134/100-000



Male header (for PCBs); Press-in pin 0.6 x 0.6 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; 100% protected against mismatching; with closed end; Press-in technology; Vertical PCB mounting

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	734-134/100-000
GTIN / EAN	4050821340072
Content	1
Order amount	1
Customer item number	

Notes

Item description: 100% protected against mismatching; only mating halves with the same pole number can be connected together Coding option available

Technical data

Miscellaneous

No. of poles	4
Pin spacing	3.5 mm (0.138 in)

Printview: Male header (for PCBs); Press-in pin 0.6 x 0.6 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; 100% protected against mismatching; with closed end; Press-in technology; Vertical PCB mounting - Item No.: 734-134/100-000


Technical data	
<i>Color</i>	<i>light gray</i>
<i>Ratings per</i>	<i>IEC/EN 60664-1</i>
<i>Rated voltage (III / 3) [V]</i>	<i>160 [V]</i>
<i>Rated impulse voltage (III / 3) [kV]</i>	<i>2.5 [kV]</i>
<i>Rated voltage (III/2) [V]</i>	<i>160 [V]</i>
<i>Rated impulse voltage (III / 2) [kV]</i>	<i>2.5 [kV]</i>
<i>Rated voltage (II / 2) [V]</i>	<i>320 [V]</i>
<i>Rated impulse voltage (II / 2) [kV]</i>	<i>2.5 [kV]</i>
<i>Rated current [A]</i>	<i>8 [A]</i>
<i>Legend for ratings</i>	<i>(III / 2) Overvoltage category III /</i>
<i>Number of levels</i>	<i>1</i>
<i>PressIn pin: Dimensions [mm]</i>	<i>0.6 x 1.2 [mm]</i>
<i>PressIn pin: Drilled hole diameter [mm]</i>	<i>1.15(+ 0.025 ... - 0.025) [mm]</i>
<i>PressIn pin: Plated through-hole diameter (HAL Sn) [mm]</i>	<i>1(+ 0.09 ... - 0.06) [mm]</i>
<i>PressIn pin: Plated through-hole diameter (Chem. Sn) [mm]</i>	<i>1(+ 0.09 ... - 0) [mm]</i>
<i>Material group</i>	<i>I</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Flammability class per UL94</i>	<i>V0</i>
<i>Limit temperature range</i>	<i>-40 ... 85 C</i>
<i>Contact material</i>	<i>Copper alloy</i>
<i>Contact plating</i>	<i>tin-plated</i>
<i>Fire load [MJ]</i>	<i>0.018 [MJ]</i>
<i>Width</i>	<i>16.4 mm / 0.646 Inch</i>
<i>Height</i>	<i>13.2 mm / 0.52 Inch</i>
<i>Height from the surface</i>	<i>10.3 mm / 0.406 Inch</i>
<i>Depth</i>	<i>8.5 mm / 0.335 Inch</i>

Printview: Male header (for PCBs); Press-in pin 0.6 x 0.6 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; 100% protected against mismatching; with closed end; Press-in technology; Vertical PCB mounting - Item No.: 734-134/100-000

Images & drawings



Printview: Male header (for PCBs); Press-in pin 0.6 x 0.6 mm; 4-pole; Pin spacing 3.5 mm / 0.138 in; 100% protected against mismatching; with closed end; Press-in technology; Vertical PCB mounting - Item No.: 734-134/100-000

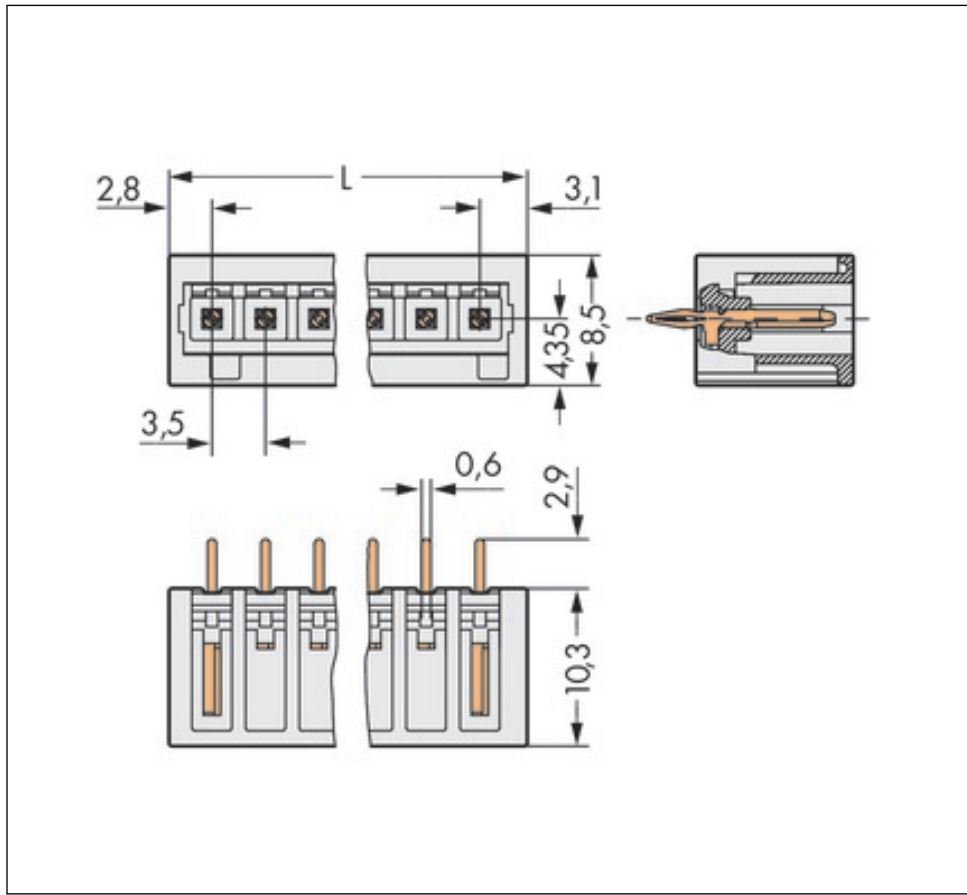

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.