


Item no.: 736-504
Product description: DOUBLE DECK PCB TERMINAL STRIP 2 SOLDER PINS IN LINE 4X2 POLE PIN SPACING 7.5 MM / 0.295 IN



Packing unit 63 pieces

Product group	4 (Printed Circuit)
Weight	10.736 g
Color	gray
No. of connection Points	8
No. of potentials	8
pole count	4
Height	26.5 mm
Height	1.04 in
Width	28.5 mm
Width	1.122 in
Depth	21 mm
Depth	0.827 in
Pin spacing from	7.5 mm
Pin spacing from	0.295 in
Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	6 kV
Current intensity EN	21 A
Pollution degree	2
Measured voltage EN	1000 V
Measured shock voltage	6 kV
Current intensity EN	21 A

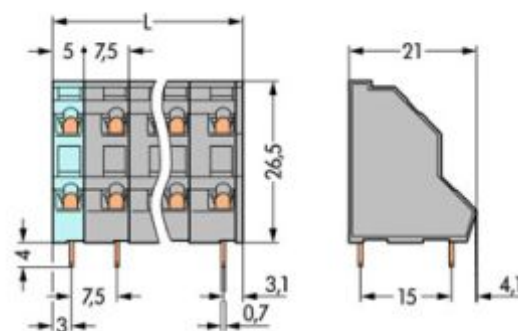

Connection method	CAGE CLAMP® CONNECTION
Cross section [mm²]	0.08 - 2.5 mm²
Wiring method	solid
Cross section [mm²]	0.08 - 2.5 mm²
Cross section [mm²]	0.25 - 1.5 mm²
Cross section [mm²]	0.25 - 2.5 mm²
Cross section [AWG]	28 - 12 AWG
Strip length from	5 mm
Strip length to	6 mm
Material group	I



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
736-504	ABS	04-HG469925/1-PDA	400	12	0,5-2,5
736-504	BV	11915/A0	400	12	0,5-2,5
736-504	CCA	NL6266	400	12	0,5-2,5
736-504	CSA	18677-26	300	10	28-12
736-504	DNV	E-9215	400	12	0,5-2,5
736-504	GL	17296-00HH	400	12	0,5-2,5
736-504	KEMA	2110204.06	400	12	0,5-2,5
736-504	RMR	11130002	400	12	0,5-2,5
736-504	UR	E45172	300/300	10/10	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected