


Item no.: 737-104
Product description: TRIPLE DECK PCB TERMINAL STRIP; 3 SOLDER PINS IN LINE; 4X3 POLE; PIN SPACING 5 MM / 0.197 IN; FRONT-ENTRY; CAGE CLAMP®CONNECTION



Packing unit 48 pieces

Product group	4 (Printed Circuit)
Pin spacing from	5 mm
Pin spacing from	0.197 in
Number of levels	3
pole count	4
Cross section from [mm²]	0.08 mm²
Cross section to [mm²]	2.5 mm²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Measured voltage EN	500 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	12 A
Weight	17.05 g
Color	gray
Wiring type	Angled Type
No. of connection Points	12

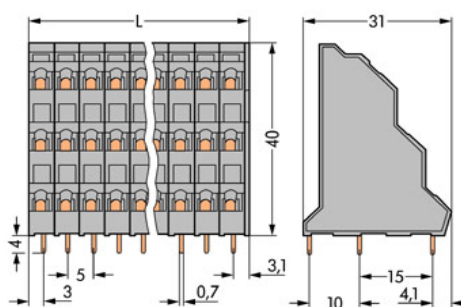

No. of potentials	12
Height	40 mm
Height	1.57 in
Width	21 mm
Width	0.827 in
Depth	31 mm
Depth	1.22 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
737-104	ABS	04-HG469925-PDA	250	12	0,5-2,5
737-104	BV	11915/A0	250	12	0,5-2,5
737-104	CCA	NL6267	250	12	0,5-2,5
737-104	CSA	18677-26	300	10	28-12
737-104	DNV	E7569	250	12	0,5-2,5
737-104	GL	17296-00HH	250	12	0,5-2,5
737-104	KEMA	2110204.07	250	12	0,5-2,5
737-104	RMR	11130002	250	12	0,5-2,5
737-104	UR	E45172	300	10	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected