


Item no.:

804-104

Product description:

1 CONDUCTOR PCB TERMINAL STRIP; 2 SOLDER PINS /
POLES STAGGERED; 4 POLE; PIN SPACING 5 MM / 0.197
IN; WITH PUSH BOTTONS; ANGLED TYPE-ENTRY

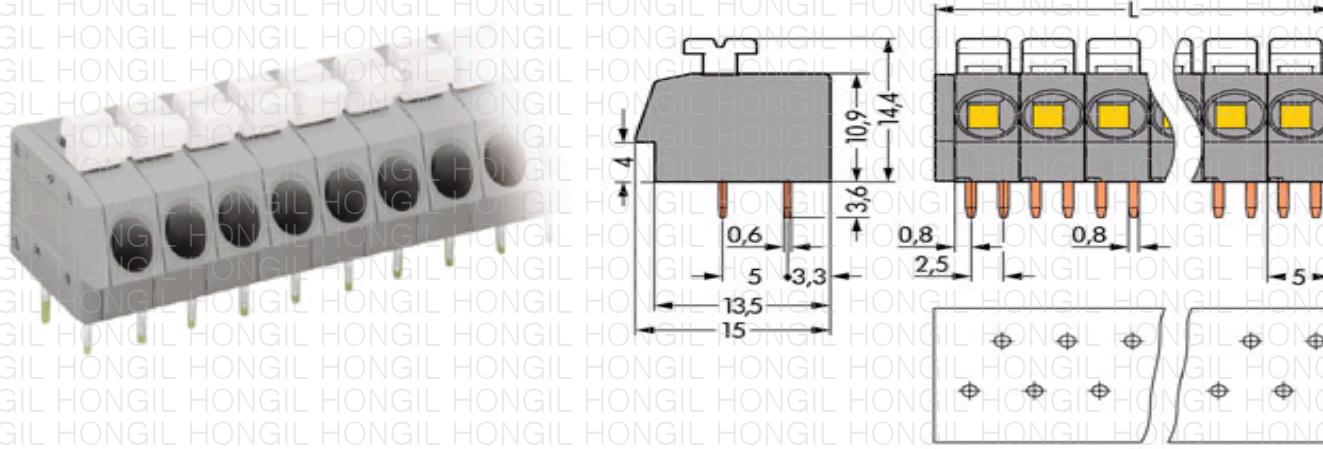

Packing unit 220 4*55 pieces

Product group

4 (Printed Circuit)

Pin spacing from

5 mm

Pin spacing from

0.197 in

pole count

4

Cross section from [mm²]

0.5 mm²

Cross section to [mm²]

2.5 mm²

Cross section from [AWG]

20 AWG

Cross section to [AWG]

12 AWG

Wiring method

e+f

Connection method

CONTACT CAGE CLAMP® CONNECTION

Measured voltage EN

250 V

Measured shock voltage

4 kV

Pollution degree

3

Current intensity EN

16 A

Measured voltage EN

500 V

Measured shock voltage

4 kV

Pollution degree

2

Current intensity EN

16 A

Weight

4.147 g

Color

gray

Wiring type

Angled Type

No. of connection Points

4