


Item no.: 280-870
 Product description: 2-CONDUCTOR DISCONNECT TERMINAL BLOCK FOR TEST AND MEASUREMENT; CENTER MARKING; WITH TEST SLOT FOR TEST PLUG Ø 2 MM/0.079 IN AND Ø 2.3 / 0.091 IN; CARRIER RAIL DIN 35; FRONT-ENTRY; CAGE CLAMP® CONNECTION

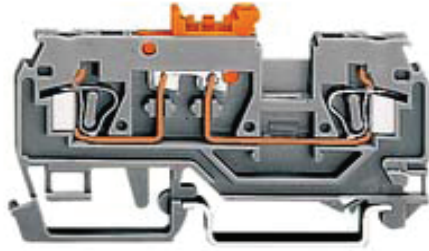

Packing unit 100 pieces

Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP® CONNECTION
Voltage CSA	300 V
Voltage UL	600 V
Current rating UL	15 A
Current rating CSA	15 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Weight	8.607 g
Color	gray
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	28.5 mm
Height	1.12 in
Width	5 mm
Width	0.197 in