


Item no.: 750-530
Product description: 8-CHANNEL DIGITAL OUTPUT MODULE DC 24 V 0,5 A
POSITIVE SWITCHING SHORT-CIRCUIT PROTECTED
CAGE CLAMP®CONNECTION



Packing unit 1 piece

Product group	15 (I/O System)
No. of outputs	8
CURRENT CONSUMPTION (INTERNAL) mA	25 mA
Voltage via power jumper contacts (max)	DC 24 V (-15% / + 20%)
Type of load	resistive, inductive, lamps
Max. switching frequency (kHz)	2 kHz
Output current	0.5 A short-circuit protected
Isolation	500 V system / supply
Current consumption typ (field side)	15 mA + load
Internal data width (Bit)	8 Bit
Single current	500 mA
Operating temperature	0 °C ... + 55 °C
Storage temperature	-25 °C ... +85 °C
Relative air humidity	95 %
Vibration resistance	acc. IEC 60068-2-6
Shock resistance	acc. IEC 60068-2-27
Degree of protection	IP 20
EMC immunity to interference	acc. EN 50082-2 (96)
EMC emission of interference	acc. EN 50081-2 (94)
Conformity marking	CE
Approvals	ATEX
Cross section from [mm²]	0.08 mm²

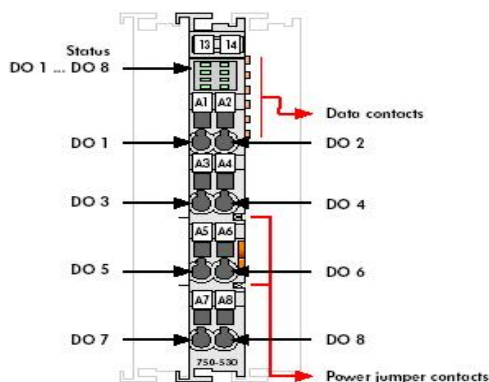

Cross section to [mm²]	2.5 mm²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Connection method	CAGE CLAMP® CONNECTION
Weight	48.5 g
Color	light gray
Height	64 mm
Height	2.52 in
Width	12 mm
Width	0.472 in
Depth	100 mm
Depth	3.937 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
750-530	ABS	03-HG374860/2-PDA			
750-530	ABS	ES 578983-X			
750-530	BSH	Bescheinigung Nr. 467			
750-530	BV	13453/B0 BV			
750-530	DNV	A-10191			
750-530	GL	26 898 - 05 HH			
750-530	IECEX	IECEX PTB 07.0064X			
750-530	KR	HMB05880-EL005			
750-530	LR	02/20026 (E2)			
750-530	NK	TA06190M			
750-530	PRS	TE/1720/880590/08			
750-530	Rina	ELE153207CS001			
750-530	UL	02 ATEX 132273 X			
750-530	UL	E175199 Sec.1			
750-530	UL	E198726 Sec.1			
750-530	UL DEMKO A/S	DEMKO 08 ATEX 142851 X			

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected