


JQX-54FE



30.4×16.0×26.0 (26.5)

R50016343 C US E160644
 03001003506

Features

- Can be welded directly onto PCB.
- Used in household appliances like air conditioning , heater and instruments etc.
- Compact high capacity relay for inductive load, rushing current of 70A and steady-state current of 20A.

Ordering Information

JQX-54FE A Z 25 b DC12V C 0.9
 1 2 3 4 5 6 7 8

1 Part number: JQX-54FE
 2 Contact arrangement: A:1A
 3 Enclosure: Z: Dust cover
 4 Contact rating: Resistive:25A/250VAC; 20A/277VAC
 Inductive:20A/250VAC; cosΦ=0.4

5 Terminal: b:PC type; NIL:PC type and QC type
 6 Coil rated voltage(V): DC:6,9,12,24,48
 7 Contact material: C:AgCdO; NIL:AgSnO₂
 8 Coil power consumption: 0.9:0.9W

Contact Data

Contact Arrangement	1A (SPSTNO)		
Contact Material	AgSnO ₂ AgCdO		
Contact Rating	Resistive: 25A/250VAC, 20A/277VAC Inductive :20A/250VAC,cosΦ=0.4		
Max. Switching Power	6380VA		
Max. Switching Voltage	300VAC	Max. Switching Current:25A rushing current:70A	
Contact Resistance or Voltage drop	<50mΩ	Item 3.12 of IEC255-7	
Operation life	Electrical	10 ⁵	Item 3.30 of IEC255-7
	Mechanical	10 ⁷	Item 3.31 of IEC255-7

Coil Parameter

Dash numbers	Coil voltage VDC		Rated current mA	Coil resistance Ω ±10%	Pickup voltage VDC(max) (75%of rated voltage)	Release voltage VDC(min) (5% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.							
006-900	6	7.8	150	40	4.5	0.3	0.9	<20	<10
009-900	9	11.7	100	90	6.7	0.5			
012-900	12	15.6	75	160	9.0	0.6			
024-900	24	31.2	37.8	640	18	1.2			
048-900	48	62.4	18.8	2560	36	2.4			

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
 2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition

Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC255-5
Dielectric Strength Between contacts Between contact and coil	50Hz 1000V 50Hz 5000V surge voltage:10kV	Item 6 of IEC255-5 Item 6 of IEC255-5 Item 8 of IEC255-5
Shock resistance	Functional:100m/s ² 11ms Survival:1000 m/s ² 11ms	IEC68-2-27 Test Ea IEC68-2-27 Test Ea
Vibration resistance	10~55Hz Double amplitude Functional 1.5mm Double amplitude Survival 2.0mm	IEC68-2-6 Test Fc IEC68-2-6 Test Fc
Terminals strength	10N 8N	IEC68-2-21 Test Ua1 and Ua2
Solderability	235°C ± 2°C 3 ± 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-30~70°C	
Relative Humidity	20~85%	IEC68-2-3 Test Ca
Mass	28g	

Qualification inspection:



Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

Safety approvals


Safety approval	UL&CUR	TUV	CQC
Load	25A/250VAC 20A/277VAC 1.5HP250VAC	25A/250VAC 20A/250VAC COS φ=0.4	25A/250VAC

Dimensions


mm /inch

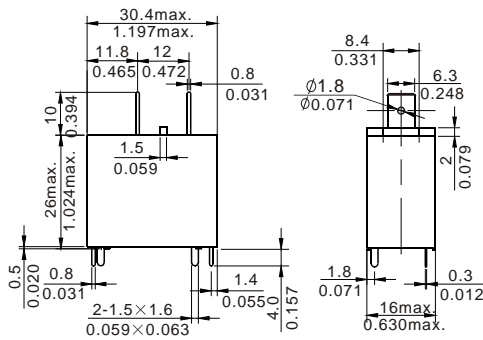

Mounting (Bottom view)

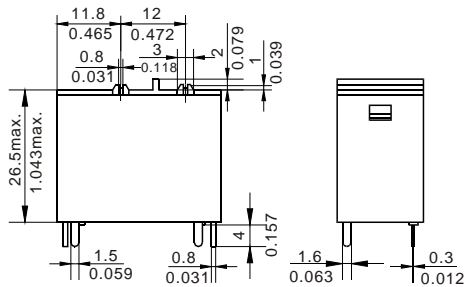

Dimensions



Wiring diagram (Bottom view)

- NOTES 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.